
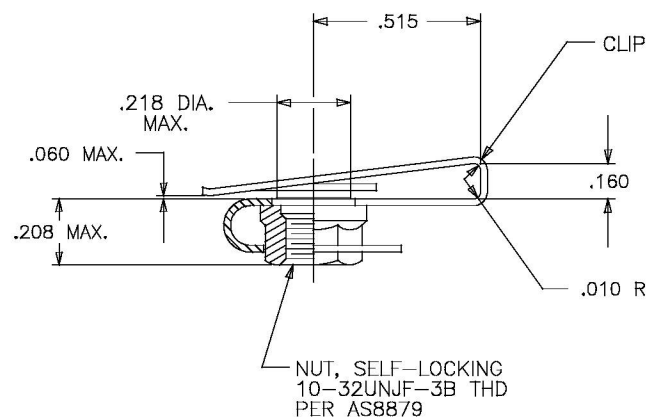


130075

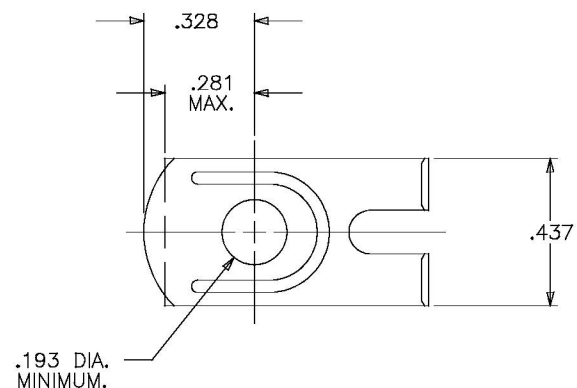

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:
 - 1.1. CLIP: C1050 STEEL, .020 THICK PER ASTM-A-682 OR ASTM-A-684.
 - 1.2. NUT: A286 STAINLESS STEEL PER AMS5732.
2. HEAT TREAT:
 - 2.1. CLIP: HRc 48-51.
 - 2.2. NUT: HRc 38-44.
3. FINISH:
 - 3.1. CLIP: CADMIUM PLATE PER AMS-QQ-P-416 TYPE II, CLASS 1.
 - 3.2. NUT: PASSIVATE PER AMS-QQ-P-35 AND MOLYBDENUM DISULFIDE DRY FILM LUBRICANT PER AS5272, TYPE I.

FAA-TSO AUTHORIZED PART

A	ECN8039	11/10/03
ISSUE	DESCRIPTION	DATE
REVISION		

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES $\pm .010$	DRAWN BY: TSC 11/7/02	DATE	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	MATERIAL:	CHECKED BY: CKT 11/8/02	DATE			
	HEAT TREAT:	APPROVED BY: BG 11/8/02	DATE	TITLE: NUT ASSY.- CLIP-ON 1032 SIZE		
	FINAL PROTECTIVE FINISH:	APPROVED BY: RGP 11/8/02	DATE			
		MFG. ACCEPT: RAD 11/8/02	DATE	CODE INDET. NO. 60119	SIZE B	DRAWING NUMBER: 130075
				SCALE: NONE	SALES	SHEET 1 OF 1