
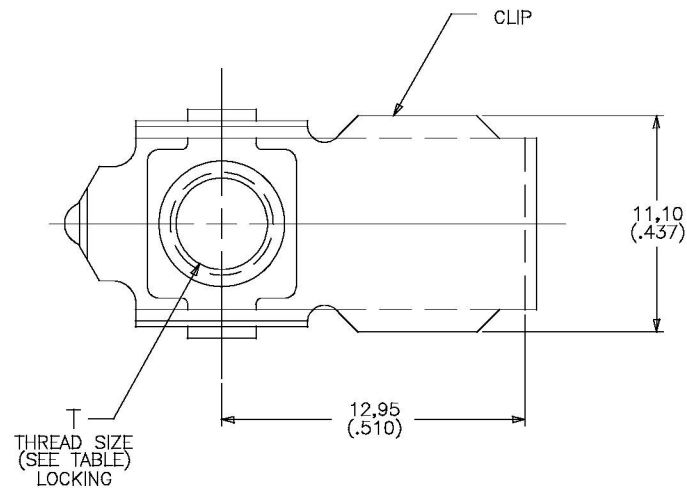


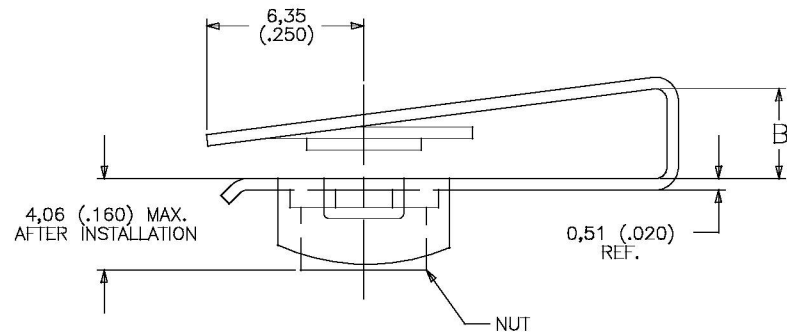

FIRST DASH NUMBER	T THREAD	EDGE DISTANCE	INSTALLATION HOLE DIA.
M3	M3 X 0,5	9,7-12,7 (.382-.500)	4,83 - 5,82 (.190 - .229)
M4	M4 X 0,7	9,7-12,7 (.382-.500)	4,83 - 5,82 (.190 - .229)
M5	M5 X 0,8	9,7-12,7 (.382-.500)	5,54 - 6,63 (.218 - .261)

SECOND DASH NUMBER	PANEL THICKNESS RANGE	B MIN.
-1	0,51 - 3,18 (.020 - .125)	3,18 (.125)

130304-()-()

NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATERIAL:
 - CLIP: CARBON STEEL, HEAT TREATED.
 - NUT: CARBON STEEL, HEAT TREATED.
- FINISH:
 - CLIP: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2.
 - NUT: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2. AND DRY FILM LUBRICANT PER MIL-L-46010, TYPE I. FULL COVERAGE ON THREADS, OTHER SURFACES OPTIONAL.
- DIMENSIONS ARE IN MILLIMETERS (INCHES):

TOLERANCE: .XX = $\pm 0,25$ (.010)
ANGLES = $\pm 2^\circ$
- SELF-LOCKING FEATURE PER MIL-N-25027.
- PART NUMBER EXAMPLE:

1 3 0 3 0 4 - () - ()

PANEL THICKNESS.

THREAD SIZE.

BASIC PART NUMBER.

A	ECN # 4444	3-1-93
ISSUE	DESCRIPTION	DATE
130304M	REVISION	

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES	DRAWN BY: F.D.	DATE: 2-4-92	THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	MATERIAL: NOTED	CHECKED BY: C.K.T.	DATE: 2-20-92			
	HEAT TREAT: NOTED	APPROVED BY: C.TANAKA	DATE: 2-20-92			
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY: J.ADAMS	DATE: 2-28-92			
		WFO. ACCEPTED: R.PAUL	DATE: 3-3-92			
				CODE IDENT. NO. 60119	SIZE B	DRAWING NUMBER: 130304-()-()
				SCALE: NONE	SALES	SHEET 1 OF 1