
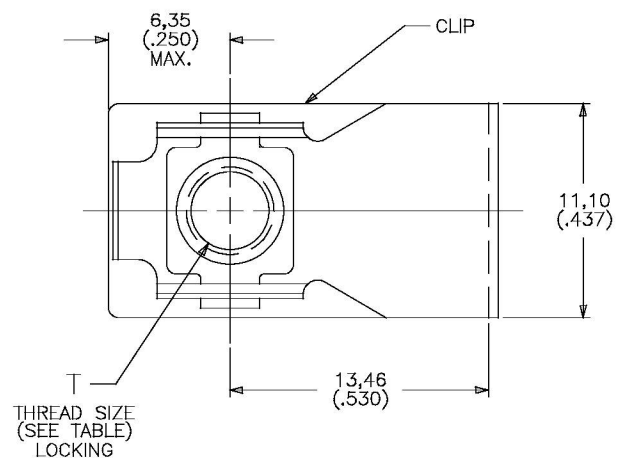


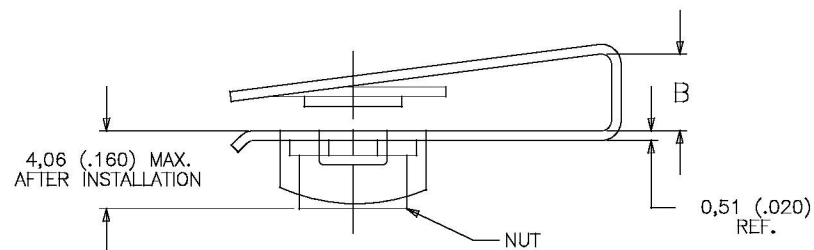

FIRST DASH NUMBER	T THREAD	EDGE DISTANCE	INSTALLATION HOLE DIA.
M3	M3 X 0,5	9,7-12,7 (.382-.500)	4,83 - 5,82 (.190 - .229)
M4	M4 X 0,7	9,7-12,7 (.382-.500)	4,83 - 5,82 (.190 - .229)
M5	M5 X 0,8	9,7-12,7 (.382-.500)	5,54 - 6,63 (.218 - .261)

SECOND DASH NUMBER	PANEL THICKNESS RANGE	B MIN.
-1	0,51 - 4,06 (.020 - .160)	4,06 (.160)
-2	4,06 - 6,35 (.160 - .250)	6,35 (.250)

130305-()-()

NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATERIAL:
 - CLIP: CARBON STEEL, HEAT TREATED.
 - NUT: CARBON STEEL, HEAT TREATED.
- FINISH:
 - CLIP: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2.
 - NUT: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2.
 AND DRY FILM LUBRICANT PER MIL-L-46010, TYPE I. FULL COVERAGE ON THREADS, OTHER SURFACES OPTIONAL.

- DIMENSIONS ARE IN MILLIMETERS (INCHES):
TOLERANCE: .XX = $\pm 0,25$ (.010)
ANGLES = $\pm 2^\circ$

- SELF-LOCKING FEATURE PER MIL-N-25027.

- PART NUMBER EXAMPLE:
 1 3 0 3 0 5 - () - ()
 PANEL THICKNESS.
 THREAD SIZE.
 BASIC PART NUMBER.

A	ECN # 4444	3-1-93
ISSUE	DESCRIPTION	DATE
130305M	REVISION	

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTION DECIMALS ANGLES NOTED	DRAWN BY: F.D. DATE: 2-5-92	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	MATERIAL: NOTED	CHECKED BY: C.K.T. DATE: 2-20-92			
	HEAT TREAT: NOTED	APPROVED BY: C.TANAKA DATE: 2-20-92	TITLE: CLIP NUT ASSEMBLY, M3, M4, & M5 SIZES, LOCKING		
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY: J.ADAMS DATE: 2-28-92 MFG. ACCEPT: R.PAUL DATE: 3-3-92			
			CODE INCH. NO. 60119	SIZE B	DRAWING NUMBER: 130305-()-()
			SCALE: NONE	SALES	SHEET 1 OF 1