



130306-()-()

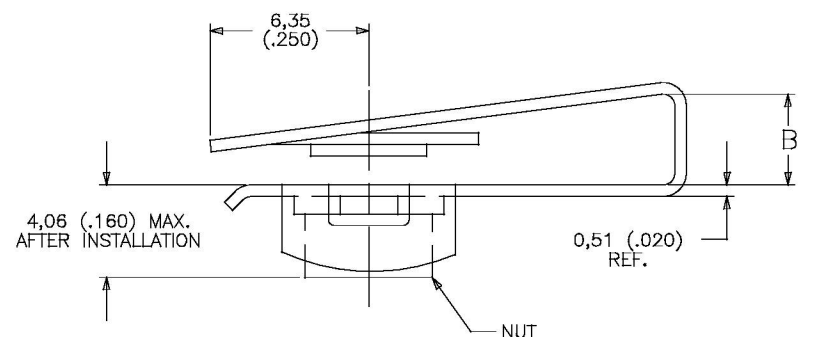

FIRST DASH NUMBER	T THREAD	EDGE DISTANCE	INSTALLATION HOLE DIA.
M3	M3 X 0,5	12,7-15,7 (.500-.618)	4,83 - 5,82 (.190 - .229)
M4	M4 X 0,7	12,7-15,7 (.500-.618)	4,83 - 5,82 (.190 - .229)
M5	M5 X 0,8	12,7-15,7 (.500-.618)	5,54 - 6,63 (.218 - .261)

SECOND DASH NUMBER	PANEL THICKNESS RANGE	B MIN.
-1	0,51 - 3,18 (.020 - .125)	3,18 (.125)

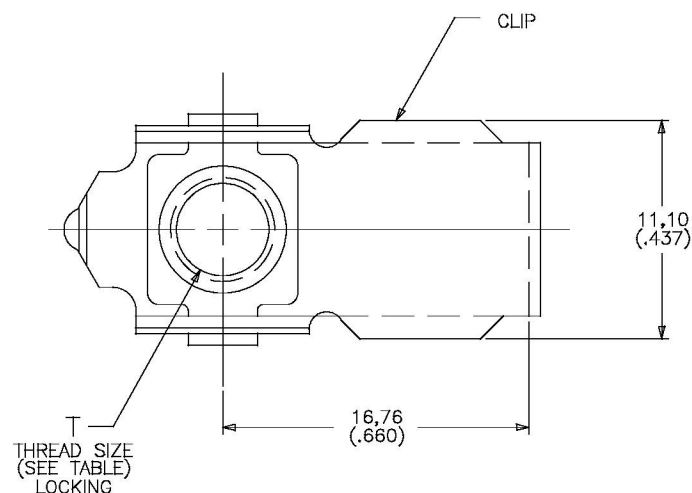

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:
 - 1.1. CLIP: CARBON STEEL, HEAT TREATED.
 - 1.2. NUT: CARBON STEEL, HEAT TREATED.
2. FINISH:
 - 2.1. CLIP: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2.
 - 2.2. NUT: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2. AND DRY FILM LUBRICANT PER MIL-L-46010, TYPE I. FULL COVERAGE ON THREADS, OTHER SURFACES OPTIONAL.
3. DIMENSIONS ARE IN MILLIMETERS (INCHES):

TOLERANCE:	.XX	=	±0,25 (.010)
	ANGLES	=	±2°
4. SELF-LOCKING FEATURE PER MIL-N-25027.
5. PART NUMBER EXAMPLE:

1	3	0	3	0	6	-	()	-	()
						PANEL THICKNESS.			
						THREAD SIZE.			
						BASIC PART NUMBER.			

A	ECN # 4444	3-1-93
ISSUE	DESCRIPTION	DATE
130306M	REVISION	

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES	DRAWN BY: F.D. 2-5-92	DATE 2-5-92	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	MATERIAL: NOTED	CHECKED BY: C.K.T. 2-20-92	DATE 2-20-92			
	HEAT TREAT: NOTED	APPROVED BY: C.TANAKA2-20-92	DATE 2-20-92			
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY: J.ADAMS 2-28-92	DATE 2-28-92			
		MFG. ACCEPT: R.PAUL 3-3-92	DATE 3-3-92	CODE INDET. NO. 60119	SIZE B	DRAWING NUMBER: 130306-()-()
				SCALE NONE	SALES	SHEET 1 OF 1