
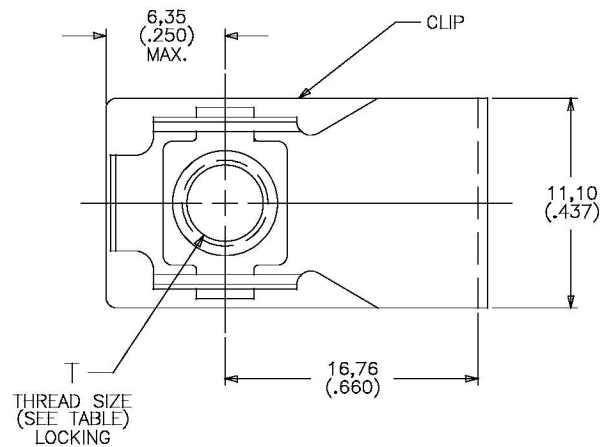


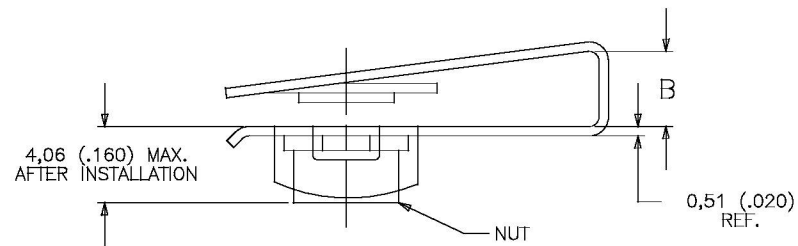

FIRST DASH NUMBER	T THREAD	EDGE DISTANCE	INSTALLATION HOLE DIA.
M3	M3 X 0,5	12,7-15,7 (.500-.618)	4,83 - 5,82 (.190 - .229)
M4	M4 X 0,7	12,7-15,7 (.500-.618)	4,83 - 5,82 (.190 - .229)
M5	M5 X 0,8	12,7-15,7 (.500-.618)	5,54 - 6,63 (.218 - .261)

SECOND DASH NUMBER	PANEL THICKNESS RANGE	B MIN.
-1	0,51 - 4,06 (.020 - .160)	4,06 (.160)
-2	4,06 - 6,35 (.160 - .250)	6,35 (.250)

130307-()-()

NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATERIAL:
 - CLIP: CARBON STEEL, HEAT TREATED.
 - NUT: CARBON STEEL, HEAT TREATED.
- FINISH:
 - CLIP: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2.
 - NUT: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2. AND DRY FILM LUBRICANT PER MIL-L-46010, TYPE I. FULL COVERAGE ON THREADS, OTHER SURFACES OPTIONAL.
- DIMENSIONS ARE IN MILLIMETERS (INCHES):

TOLERANCE: .XX = $\pm 0,25$ (.010)
ANGLES = $\pm 2^\circ$
- SELF-LOCKING FEATURE PER MIL-N-25027.
- PART NUMBER EXAMPLE:

1 3 0 3 0 7 - () - ()
 PANEL THICKNESS.
 THREAD SIZE.
 BASIC PART NUMBER.

A	ECN # 4444	3-1-93
ISSUE	DESCRIPTION	DATE
130307M	REVISION	

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES	DRAWN BY: F.D. 2-5-92	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA TITLE: CLIP NUT ASSEMBLY, M3, M4, & M5 SIZES, LOCKING	
	NOTED	CHECKED BY: C.K.T. 2-20-92		
	MATERIAL: NOTED	APPROVED BY: C.TANAKA2-20-92		
	HEAT TREAT: NOTED	APPROVED BY: J.ADAMS 2-28-92		
	FINAL PROTECTIVE FINISH: NOTED	MFG. ACCEPT: R.PAUL 3-3-92	CODE INDET. NO. 60119	SIZE B
			DRAWING NUMBER: 130307-()-()	
			SCALE: NONE	SHEET 1 OF 1