
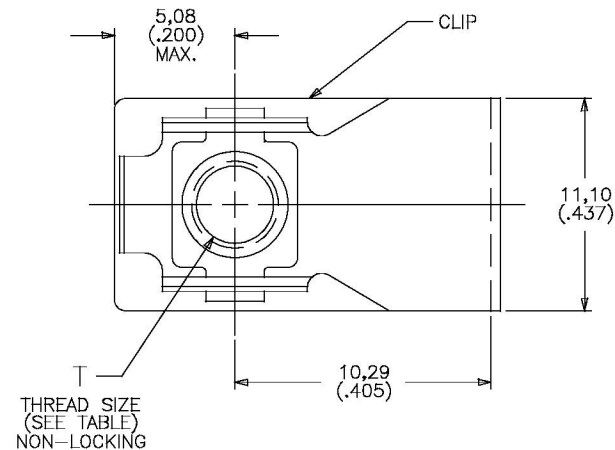


130313-()-()

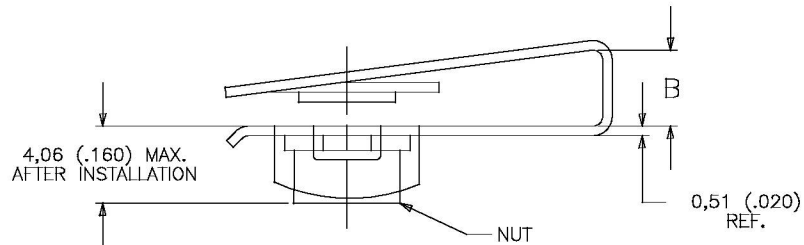

FIRST DASH NUMBER	T THREAD	EDGE DISTANCE MAX.	INSTALLATION HOLE DIA.	APPROX. WEIGHT Kg(LBS.)/100 PIECES
M3	M3 X 0,5	9,53 (.375)	4,83 – 5,82 (.190 – .229)	.145 (.320)
M4	M4 X 0,7	9,53 (.375)	4,83 – 5,82 (.190 – .229)	.150 (.331)
M5	M5 X 0,8	9,53 (.375)	5,54 – 6,63 (.218 – .261)	.150 (.331)

SECOND DASH NUMBER	PANEL THICKNESS RANGE	B MIN.
-1	0,51 – 3,18 (.020 – .125)	3,18 (.125)
-2	2,29 – 4,06 (.090 – .160)	4,06 (.160)
-3	4,06 – 6,35 (.160 – .250)	6,35 (.250)

NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATERIAL:
 - CLIP: CARBON STEEL, HEAT TREATED.
 - NUT: CARBON STEEL, HEAT TREATED.
- FINISH:
 - CLIP: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2.
 - NUT: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2.
- DIMENSIONS ARE IN MILLIMETERS (INCHES):

TOLERANCE: .XX = $\pm 0,25$ (.010)

ANGLES = $\pm 2^\circ$
- PART NUMBER EXAMPLE:
 1 3 0 3 1 3 - () - ()
 PANEL THICKNESS.
 THREAD SIZE.
 BASIC PART NUMBER.

ISSUE	DESCRIPTION	DATE
130313M	REVISION	9313-017

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES NOTED	DRAWN BY: F.D. 4-12-93 DATE	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA	
	MATERIAL: NOTED	CHECKED BY: RAD 4/12/93 DATE		
	HEAT TREAT: NOTED	APPROVED BY: C TANAKA 9/16/93 DATE	TITLE: CLIP NUT ASSEMBLY, M3, M4, & M5 SIZES, NON-LOCKING	
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY: J ADAMS 4/24/93 DATE		
		MFG. ACCEPT: D PAUL 4/26/93 DATE	CODE IDENT. NO. 60119	SIZE B
			DRAWING NUMBER: 130313-()-()	
			SCALE: NONE	SALES SHEET 1 OF 1