



130343-3

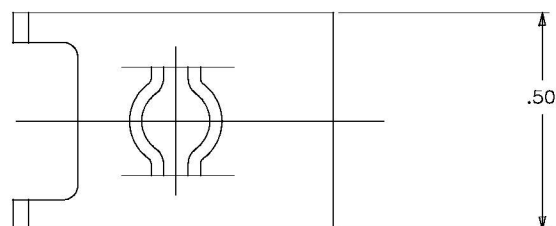


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. PANEL RANGE: .025—.064
2. CENTER OF HOLE TO EDGE: .343 MAX
INSTALLATION HOLE SIZE: .218
3. THREAD SIZE OR SCREW SIZE = 10Z

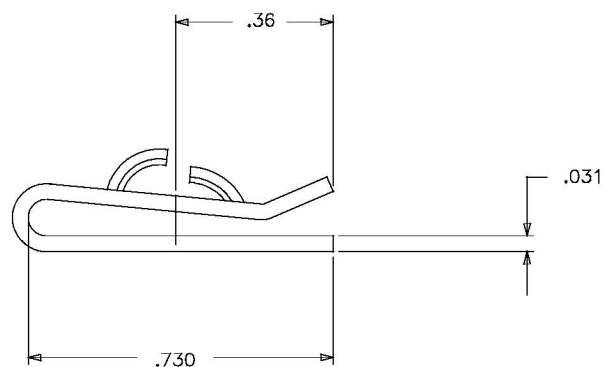

ISSUE	DESCRIPTION	DATE
REVISION		0013-011

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES	DRAWN BY: CKT	DATE 10-9-00	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	± .020	CHECKED BY: RAD	DATE 10-11-00			
	MATERIAL: 1074/1075 CARBON STEEL	APPROVED BY: D.MARTIN	DATE 10-10-00	TITLE: NUT-"U" TYPE SHEET SPRING		
	HEAT TREAT: SPRING TEMPER	APPROVED BY: D.PAUL	DATE 10-10-00			
	FINAL PROTECTIVE FINISH: CADMIUM-TITANIUM PLATING PER AMS 2419	MFG. ACCEPT: D.PANZER	DATE 10-10-00	CODE INVENT. NO. 60119	SIZE B	DRAWING NUMBER: 130343-3
				SCALE: NONE	SALES	SHEET 1 OF 1