
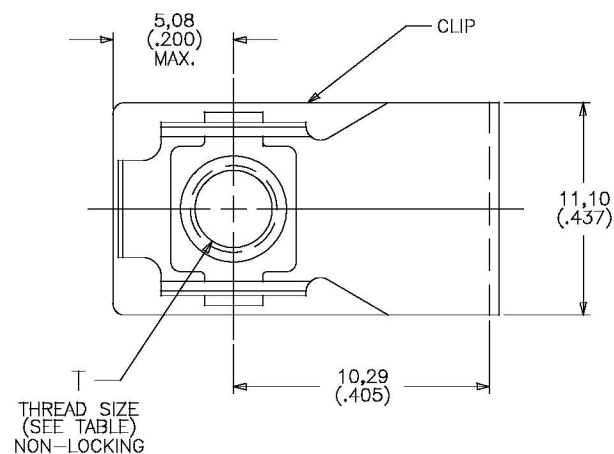


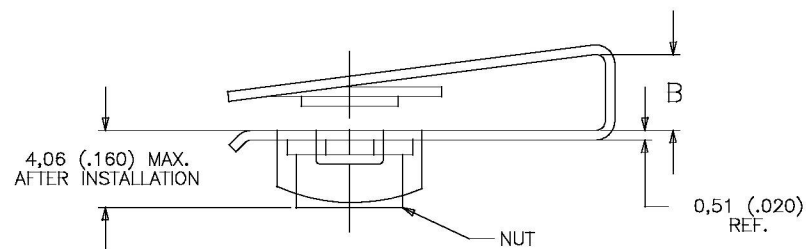

FIRST DASH NUMBER	T THREAD	EDGE DISTANCE MAX.	INSTALLATION HOLE DIA.	APPROX. WEIGHT Kg(LBS.)/100 PIECES
M4	M4 X 0,7	9,53 (.375)	5,54 – 6,63 (.218 – .261)	.150 (.331)
M5	M5 X 0,8	9,53 (.375)	5,54 – 6,63 (.218 – .261)	.150 (.331)

SECOND DASH NUMBER	PANEL THICKNESS RANGE	B MIN.
–1	0,51 – 2,28 (.020 – .090)	2,69 (.106)

130344–M()–()

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:
 - 1.1. CLIP: A286 PER AMS 5525
 - 1.2. NUT: A286 PER AMS 5525
2. FINISH:
 - 2.1. CLIP: PASSIVATED PER AMS QQ–P–35
 - 2.2. NUT: SILVER PLATED PER AMS 2410.
3. DIMENSIONS ARE IN MILLIMETERS (INCHES):

TOLERANCE:	.XX	=	±0,25 (.010)
	ANGLES	=	±2°
4. PART NUMBER EXAMPLE:

1 3 0 3 4 4

–

M()

–

()

PANEL THICKNESS.

THREAD SIZE.

BASIC PART NUMBER.

ISSUE	DESCRIPTION	DATE
	REVISION	0113–003

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES	DRAWN BY: DATE CKT 2–21–01	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	NOTED	CHECKED BY: DATE RAD 2/21/01			
	MATERIAL: NOTED	APPROVED BY: DATE RAD 2/21/01	TITLE: CLIP NUT ASSEMBLY, M4, & M5 SIZES, NON–LOCKING		
	HEAT TREAT: NOTED	APPROVED BY: DATE D. MARTIN 2/21/01			
	FINAL PROTECTIVE FINISH: NOTED	MFG. ACCEPT: DATE D. PAUL 2/22/01	CODE INVENT. NO. 60119	SIZE B	DRAWING NUMBER: 130344–M()–()
			SCALE: NONE	SALES	SHEET 1 OF 1