
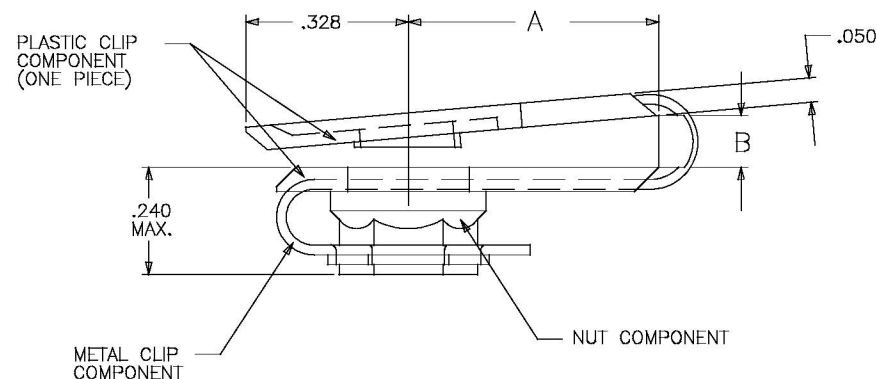


130506-()()

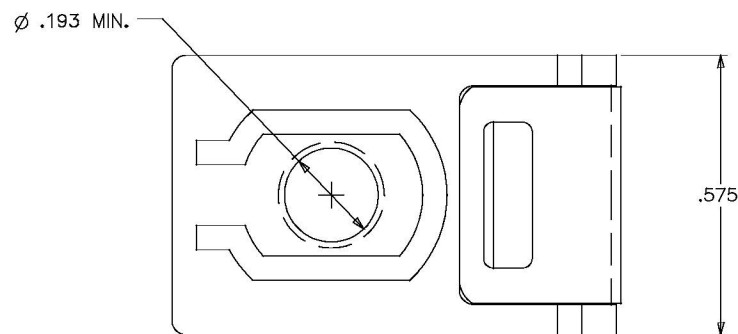

DASH NUMBER	A ±.020	B MIN.	SHEET THICKNESS	EDGE DISTANCE
-1	.515	.095	.020-.090	.35-.50
-2	.665	.095	.020-.090	.51-.65
-3	.665	.155	.091-.150	.51-.65
-4	.515	.155	.091-.150	.35-.50
-5	.740	.235	.140-.230	.60-.71

NOTES:

- MATERIAL:
 - CLIP: CARBON STEEL PER ASTM-A-684.
NYLON 6 OR 6/6.
 - NUT: ALLOY STEEL PER ASTM-A-322, AMS6300.
- HEAT TREAT:
 - CLIP: HRC 45 MINIMUM.
 - NUT: HRC 46 MAXIMUM.
- FINISH:
 - CLIP: CADMIUM PLATED PER QQ-P-416 TYPE II, CLASS 2.
"G" CODED PARTS - CAMIUM PLATED PER QQ-P-416 TYPE II, CLASS 2 AND EPOXY PRIMER BMS10-11 TYPE I PER EMPS073.
 - NUT: CADMIUM PLATED PER QQ-P-416 TYPE II, CLASS 2 AND DRY FILM LUBRICATED PER AS5272 TYPE I.

4. PART NUMBER EXAMPLE:

1 3 0 5 0 6 - () ()

NO SUFFIX INDICATES CADMIUM PLATED METAL CLIP.

"G" CODED SUFFIX INDICATES CADMIUM PLATED AND BMS10-11 COATED METAL CLIP.

DASH NUMBER INDICATES PART CONFIGURATION (SEE TABLE)

BASIC PART NUMBER

PATENT APPLIED FOR – FILING DATE 04-18-01, SERIAL NO. 09/837,391

ISSUE	DESCRIPTION	DATE
	REVISION	

NEXT ASSEMBLY END ITEM	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES ±.02	DRAWN BY: R.A.D. 06-01-01	DATE: 06-01-01	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA	
	MATERIAL: NOTED	CHECKED BY: R.DUENAS 06-01-01	DATE: 06-01-01		
	HEAT TREAT: NOTED	APPROVED BY: C.K.T. 06/04/01	DATE: 06/04/01	TITLE: CLIP NUT, 1032 SIZE, LOCKING NUT, COMPOSITE/METALLIC	
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY: J.V.F. 06/11/01	DATE: 06/11/01		
		MTG. ACCEPT: D. PAUL 06/11/01	DATE: 06/11/01	CODE INVENT. NO. 60119	SIZE B
				DRAWING NUMBER: 130506-()()	
				SCALE: NONE	SHEET 1 OF 1