
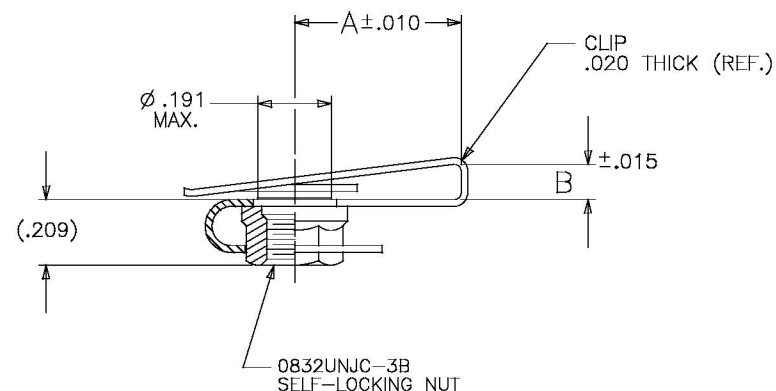


13080008—()

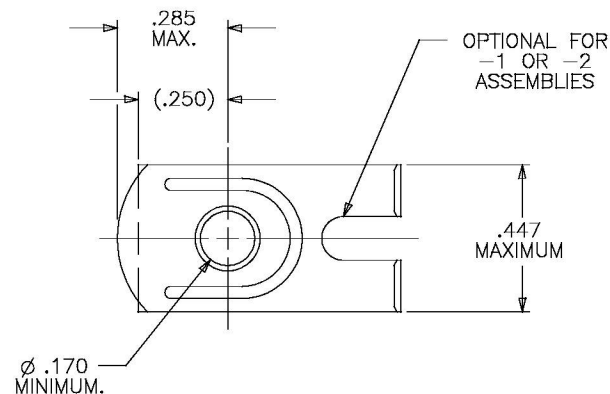

DASH NUMBER	A ±.010	B ±.010	NOMINAL EDGE DISTANCE	MOUNTING SHEET THICKNESS	RECOMMENDED INSTALLATION HOLE DIA.
-1	.265	.180	.250	.020—.120	.192—.202
-2	.300	.130	.281	.020—.120	.192—.202
-3	.395	.163	.375	.020—.120	.192—.202
-4	.520	.190	.500	.020—.120	.192—.202
-5	.665	.190	.625	.020—.120	.192—.202

NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATERIAL:
1.1. NUT: 4037 ALLOY STEEL Rc 35 MINIMUM.
1.2. CLIP: C1050 STEEL, AUSTEMPERED TO Rc 48-52.
- FINISH:
2.1. NUT: CADMIUM PLATE PER QQ-P-416 TYPE II, CLASS 2.
MOLYBDENUM DISULPHIDE DRY FILM LUBRICANT
2.2. CLIP: CADMIUM PLATE PER QQ-P-416 TYPE II, CLASS 2.
- NUTS MEET MIL-N-25027, 125,000 PSI CLASS.
- FLOAT: APPROX .011 RADIAL WHEN USED WITH RECOMMENDED INSTALLATION HOLE.

FAA-TSO AUTHORIZED PART

ISSUE	DESCRIPTION	DATE

REPRODUCTION OF THIS DRAWING OR MANUFACTURE OF THE PROPRIETARY PARTS SHOWN HERE WITHOUT WRITTEN PERMISSION OF THE MONADNOCK COMPANY IS PROHIBITED.

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES ±.010	DRAWN BY: C.TANAKA 11/14/89	DATE 11/14/89	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA TITLE: NUT ASSEMBLY, CLIP-ON 0832 SIZE
	MATERIAL:	CHECKED BY: C.K.T. 11/14/89	DATE 11/14/89	
	HEAT TREAT:	APPROVED BY: C.TANAKA 11/14/89	DATE 11/14/89	
	FINAL PROTECTIVE FINISH:	APPROVED BY: MARTY COHEN 11/14/89	DATE 11/14/89	
		MFG. ACCEPT:	DATE	CODE INCH. NO. 60119 SIZE B DRAWING NUMBER: 13080008—()
		SCALE:	NONE	SALES SHEET 1 OF 1