



13080030-()-()

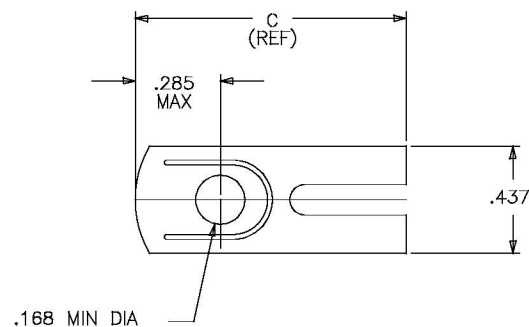

FIRST DASH NO.	A ±0,38 ±.015	EDGE DISTANCE MAX.	C	SECOND DASH NO.	B MIN	PANEL THICKNESS RANGE
-1	6,98 .275	6,35 .250	12,07 .475	-1	1,52 .060	0,51-1,52 .020-.060
-2	10,29 .405	9,53 .375	15,37 .605	-2	3,18 .125	1,52-3,18 .060-.125
-3				-3	4,06 .160	0,51-4,06 .020-.160
-4	13,46 .530	12,70 .500	19,81 .780	-4	4,75 .187	3,18-4,75 .125-.187
-5	16,76 .660	15,75 .620	23,11 .910	-5	6,35 .250	4,75-6,35 .187-.250

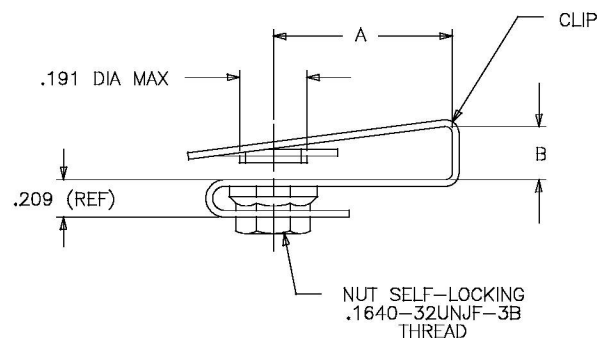

NOTES:

- MATERIAL:
CLIP: 17-7 PH CRES PER AMS 5528. CONDITION TH1050.
NUT: A286 CRES PER AMS 5731 CAPABLE OF AMS5732, AMS5734, AND AMS5737.
- FINISH:
CLIP: PASSIVATED PER QQ-P-35.
NUT: SILVER PLATED PER AMS 2410.
- LOCKING TORQUE PER MIL-N-25027.
- DIMENSIONS: MILLIMETERS/INCHES.
- INSTALLATION HOLE SIZE: .192 MIN DIA
- PART CALLOUT EXP:

13080030 - 1 - 1

SECOND DASH NUMBER (SEE TABLE)
FIRST DASH NUMBER = "A" DIM. (.275) "C" DIM. (.475)

ISSUE	DESCRIPTION	DATE
	REVISION	

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES ±.010	DRAWN BY: CKT 12-19-95	DATE			THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA
	MATERIAL:	NOTED	CHECKED BY:	R. DUENAS 12/19/91	DATE	
	HEAT TREAT:	NOTED	APPROVED BY:	C TANAKA 12/19/95	DATE	
	FINAL PROTECTIVE FINISH:	NOTED	APPROVED BY:		DATE	
		DATE	DATE	DATE	DATE	TITLE: NUT ASSY.- CLIP ON, 8-32 SIZE STAINLESS STEEL
		DATE	DATE	DATE	DATE	
		DATE	DATE	DATE	DATE	CODE IDENT. NO. 60119 SIZE B DRAWING NUMBER: 13080030-()-()
		DATE	DATE	DATE	DATE	SALES NONE SALES SHEET 1 OF 1