


13100005-()

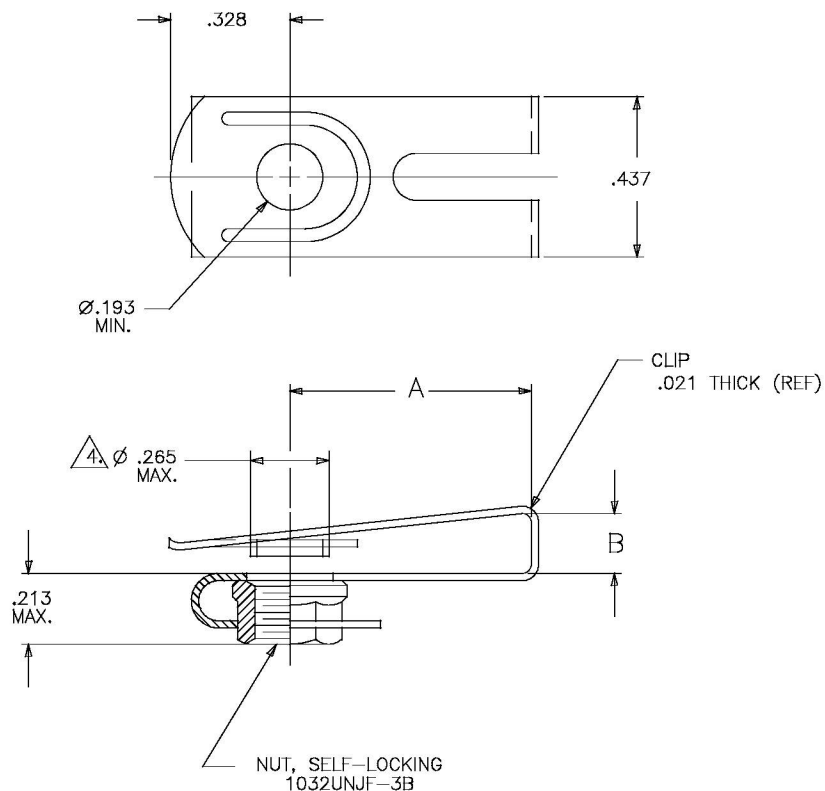

DASH NUMBER	A	B MIN.	SHEET THICKNESS	NOMINAL EDGE MARGIN
-1	.515	.095	.020-.090	.350-.500
-2	.665	.095	.020-.090	.510-.650
-3	.665	.155	.091-.150	.510-.650
-4	.515	.155	.091-.150	.350-.500
-5	.740	.235	.140-.230	.600-.710

NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATERIAL:
CLIP: 1050 STEEL, HARDENED AND AUSTEMPERED TO RC 48-51.
NUT: CARBON OR ALLOY STEEL, HEAT TREATED.
- FINISH:
CLIP: NO SUFFIX = CADMIUM PLATED PER QQ-P-416, TYPE II, CL.1.
"G" SUFFIX = COAT BMS 10-11, TYPE I PER EMPS 073 OR EQUIVALENT OVER THE CADMIUM PLATE.
NUT: CADMIUM PLATED PER QQ-P-416, TYPE II, CL.2 AND DRY FILM LUBRICANT.
- NUT TO BE PER MIL-N-25027.
- RECOMMENDED INSTALLATION HOLE SIZE: .250 NOM.
- PART CALLOUT.
13100005-10
"G" OPTIONAL FINISH.
'A' = .515, 'B' = .095 MIN.

THIS PRODUCT IS COVERED BY PATENT # 5,039,264

C	ECN # 5564	5-21-97
B	ADDED = PATENT APPLIED FOR	8-26-88
ISSUE	DESCRIPTION	DATE
REVISION		9313-008

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES ±.010	DRAWN BY: CKT	DATE: 8-9-88	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	MATERIAL: NOTED	CHECKED BY: CKT	DATE: 8-9-88			
	HEAT TREAT: NOTED	APPROVED BY: C.TANAKA	DATE: 8-9-88	TITLE: NUT ASSY.- CLIP-ON 1032 SIZE NON-SCRATCH		
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY: M. COHEN	DATE: 8-9-88			
		MFG. ACCEPTED: R.G.P.	DATE: 8-9-88	CODE IDENT. NO. 60119	SIZE B	DRAWING NUMBER: 13100005-()
		SCALE: NONE		SALES SHEET 1 OF 1		