


13100043-()-()

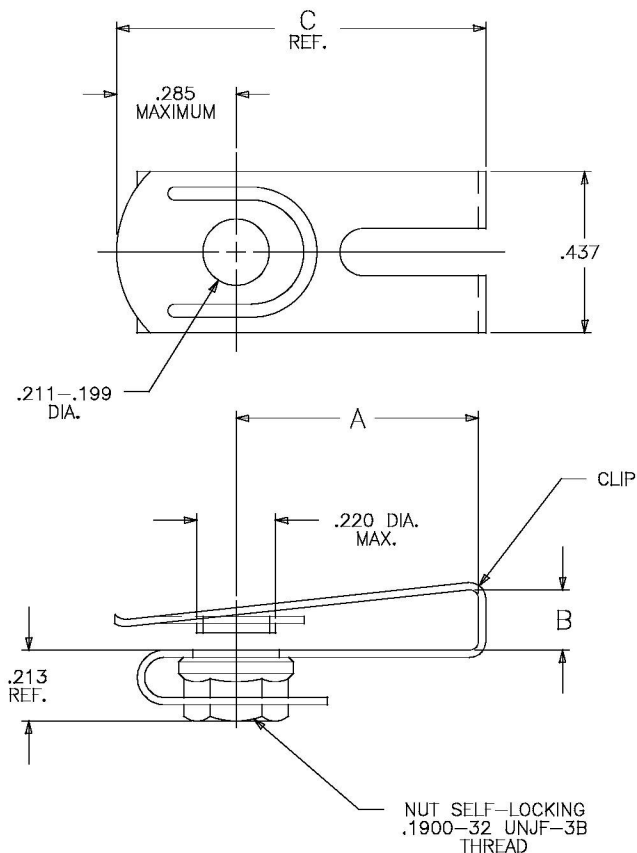

FIRST DASH NO.	A ± 0.25 ± .010	EDGE DISTANCE MAXIMUM	C REF.	SECOND DASH NO.	B MIN.	PANEL THICKNESS RANGE
-1	6,98 .275	6,35 .250	12,07 .475	-1	1,52 .060	0,51-1,52 .020-.060
-2	10,29 .405	9,53 .375	15,37 .605	-2	3,18 .125	0,51-3,18 .020-.125
-3	12,95 .510	12,70 .500	19,30 .760	-3	4,06 .160	0,51-4,06 .020-.160
-4	13,46 .530	12,70 .500	19,81 .780	-4	4,75 .187	3,18-4,75 .125-.187
-5	16,76 .660	15,75 .620	23,11 .910	-5	6,35 .250	4,06-6,35 .160-.250

NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATERIAL:
1.1 CLIP: 17-7PH CRES PER AMS5528, COND. TH1050.
1.2 NUT: A286 CRES PER AMS5731 CAPABLE OF AMS5732, AMS5734 AND AMS5737, HEAT TREATED.
- FINISH:
2.1 CLIP: PASSIVATED PER QQ-P-35.
2.2 NUT: PASSIVATED PER QQ-P-35. DRY FILM LUBRICANT PER MIL-L-46010 TYPE I, OR EQUIVALENT.
- LOCKING TORQUE PER MIL-N-25027.
- DIMENSIONS: MILLIMETERS/INCHES.
- INSTALLATION HOLE SIZE: .218-.261 DIA.
- PART CALLOUT EXAMPLE:
1 3 1 0 0 0 4 3 - 1 - 1
BASIC PART NUMBER.
SECOND DASH NUMBER, PANEL THICKNESS (SEE TABLE).
FIRST DASH NUMBER = "A" DIM. (.275) "C" DIM. (.475).

ISSUE	DESCRIPTION	DATE
REVISION	9213-013	

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES ± .010	DRAWN BY: F.D. 11-25-92	DATE
	MATERIAL: NOTED	CHECKED BY:	DATE
	HEAT TREAT: NOTED	APPROVED BY:	DATE
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY:	DATE
		MFG. ACCEPT:	DATE
		THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA	
		TITLE: NUT ASSY.- CLIP-ON, 10-32 SIZE STAINLESS STEEL	
		CODE IDENT. NO. 60119	SIZE B
		DRAWING NUMBER: 13100043-()-()	
		SCALE: NONE	SHEET 1 OF 1