


13100059-2-2

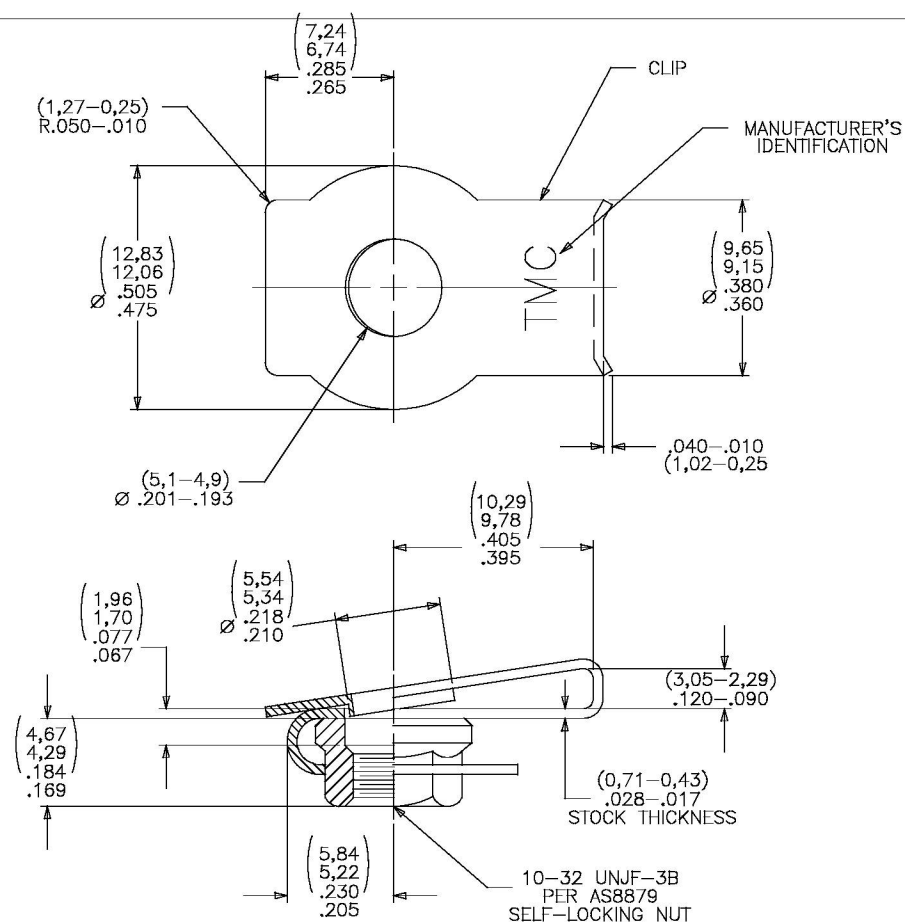

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:
 - 1.1. CLIP: A286 CRES PER AMS5525.
 - 1.2. NUT: A286 CRES PER AMS5731 CAPABLE OF AMS5732, AMS5734 AND AMS5737.
2. HEAT TREAT:
 - 2.1. CLIP: HRC 30 MINIMUM
 - 2.2. NUT: HRC 34-48
3. FINISH:
 - 3.1. CLIP: PASSIVATE PER AS41100-09 NOTE 3.
 - 3.2. NUT: SILVER PLATED PER AMS 2411 .0002[0,005]-.0006[0,015] THICK
4. RECOMMENDED INSTALLATION HOLE DIAMETER: .220-.232.
5. MAXIMUM EDGE DISTANCE: .375.
6. DIMENSIONS IN INCHES
MILLIMETERS IN ()
7. WEIGHT: .54 LBS./100 (APPROX.)

F	ECN # 8071	11/25/03
E	ECN # 7532	08-08-01
ISSUE	DESCRIPTION	DATE
REVISION		9513-004

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES ±.010		DRAWN BY: DATE CLIF 6-5-95		 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	MATERIAL: NOTED		CHECKED BY: DATE R.A.D. 10-27-98				
	HEAT TREAT: NOTED		APPROVED BY: DATE R. DUENAS 10-27-98		TITLE: NUT ASSEMBLY, CLIP-ON, 1032 SIZE SELF-LOCKING		
	FINAL PROTECTIVE FINISH: NOTED		APPROVED BY: DATE JOSE S. 12-21-98				
			MFG. ACCEP.T.: DATE T. CORONA 10-29-98		CODE IDENT. NO. 60119	SIZE B	DRAWING NUMBER: 13100059-2-2
					SOLES: NONE	SALES	SHEET 1 OF 1