


13100079-()

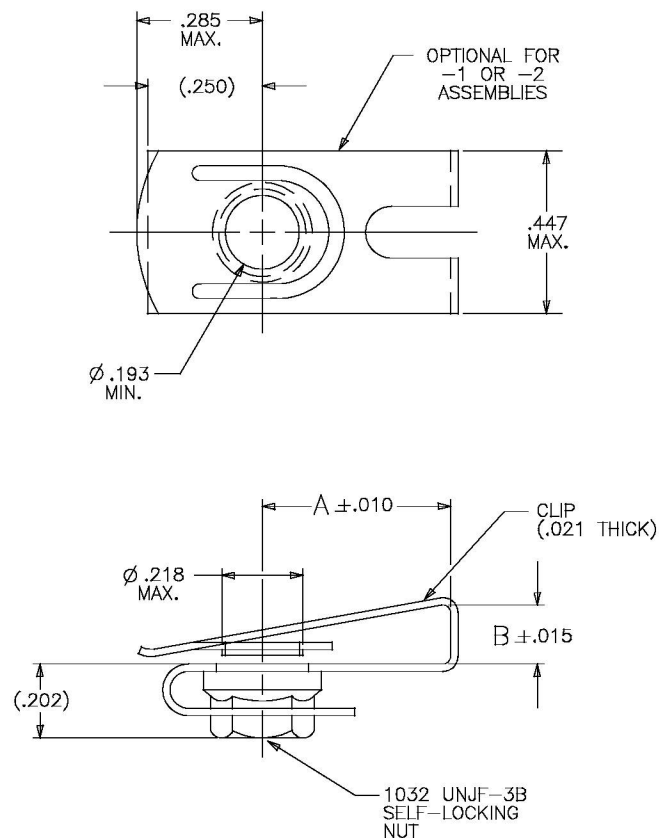

DASH NO.	A ±.010	B ±.015	NOMINAL EDGE DISTANCE	MOUNTING SHEET THICKNESS	RECOMMENDED INSTALLATION HOLE DIAMETER
-1	.265	.180	.250	.020-.120	.220-.230
-2	.300	.130	.281	.020-.120	.220-.230
-3	.395	.163	.375	.020-.090	.220-.230
-4	.520	.190	.500	.020-.120	.220-.230
-5	.665	.190	.625	.020-.120	.220-.230
-6	.749	.280	.705	.140-.250	.220-.230

NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATERIAL:
 - NUT: 4037 ALLOY STEEL Rc 35 MINIMUM.
 - CLIP: C1050 STEEL, AUSTEMPERED TO Rc 48-52.
- FINISH:
 - NUT: ZINC PLATED PER ASTM-B-633 TYPE II, CL. SC2, .0003-.0004 THICK AND DRY FILM LUBRICANT PER AS5272 TYPE I.
 - CLIP: ZINC PLATED PER ASTM-B-633 TYPE II, CL. SC2.
- FLOAT: APPROX. .011 RADIAL WHEN USED WITH RECOMMENDED INSTALLATION HOLE.
- PART NUMBER EXAMPLE:
13100079-()

"-1"; 'A'DIM.=.265, 'B'DIM.=.180

FAA-TSO AUTHORIZED PART

ISSUE	DESCRIPTION	DATE
	REVISION	9813-017

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES ±.010		DRAWN BY: C.P.M. DATE: 11-02-98		 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	MATERIAL: NOTED		CHECKED BY: J. ROJAS DATE: 11-11-98				
	HEAT TREAT: NOTED		APPROVED BY: C.K.T. DATE: 11-12-98		TITLE: NUT ASSEMBLY, CLIP-ON, ZINC PLATE, 1032 SIZE		
	FINAL PROTECTIVE FINISH: NOTED		APPROVED BY: JOSE SERRANO DATE: 11-12-98				
			MFG. ACCEPT: T. CORONA DATE: 11-20-98		CODE INVENT. NO. 60119		SIZE B
		SALES NONE		SALES		SHEET 1 OF 1	