
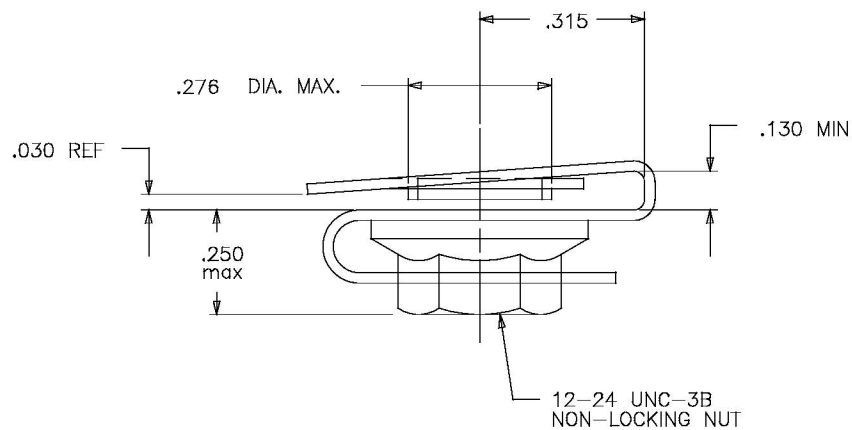


13120002-2

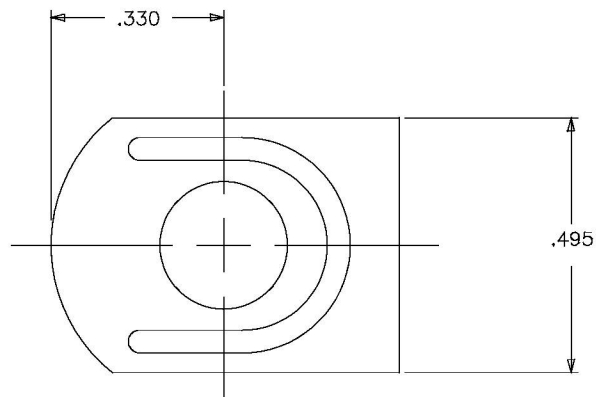

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:
 - 1.1. CLIP: 1050 CARBON STEEL.
 - 1.2. NUT: 4037 ALLOY STEEL.
2. HEAT TREAT:
 - 2.1. CLIP: RC 46 MINIMUM.
 - 2.2. NUT: RC 35 MINIMUM.
3. FINISH:
 - 3.1. CLIP: ZINC PLATED PER ASTM-B-633, TYPE II, CLASS SC2, BLACK CHROMATE
 - 3.2. NUT: ZINC PLATED PER ASTM-B-633, TYPE II, CLASS SC2, BLACK CHROMATE
4. INSTALLATION DATA:
 - 4.1. NOMINAL EDGE DISTANCE: .281
 - 4.2. MOUNTING SHEET THICKNESS: .125
 - 4.3. RECOMMENDED INSTALLATION HOLE: .279
5. DIMENSIONS IN INCHES

NEXT ASSEMBLY END ITEM	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES	DRAWN BY: C.K.T. 4-17-97	DATE	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	± .010	CHECKED BY: R.DUENAS 4/22/97	DATE			
	MATERIAL: NOTED	APPROVED BY: R.DUENAS 4/22/97	DATE	TITLE: NUT ASSY., CLIP-ON, 12-24, NON-LOCKING		
	HEAT TREAT: NOTED	APPROVED BY: B.GUEVARA 4/22/97	DATE			
	FINAL PROTECTIVE FINISH: NOTED	MFG. ACCEPTED: T.CORONA 4/22/97	DATE	CODE INVENT. NO. 60119	SIZE B	DRAWING NUMBER: 13120002-2
				SCALE: NONE	SALES	SHEET 1 OF 1

ISSUE	DESCRIPTION	DATE
	REVISION	9713-003