




Tour Gamma A
193, rue de Bercy
75582 PARIS CEDEX 12
Phone 33 (0)1 44 67 85 85
Fax 33 (0)1 44 67 88 76

**SLEEVE TAPER-HI-LITE[®],
100° FLUSH HEAD
INCONEL pin shear 125 ksi min
3/32 grip variation
Nominal size**

STL150

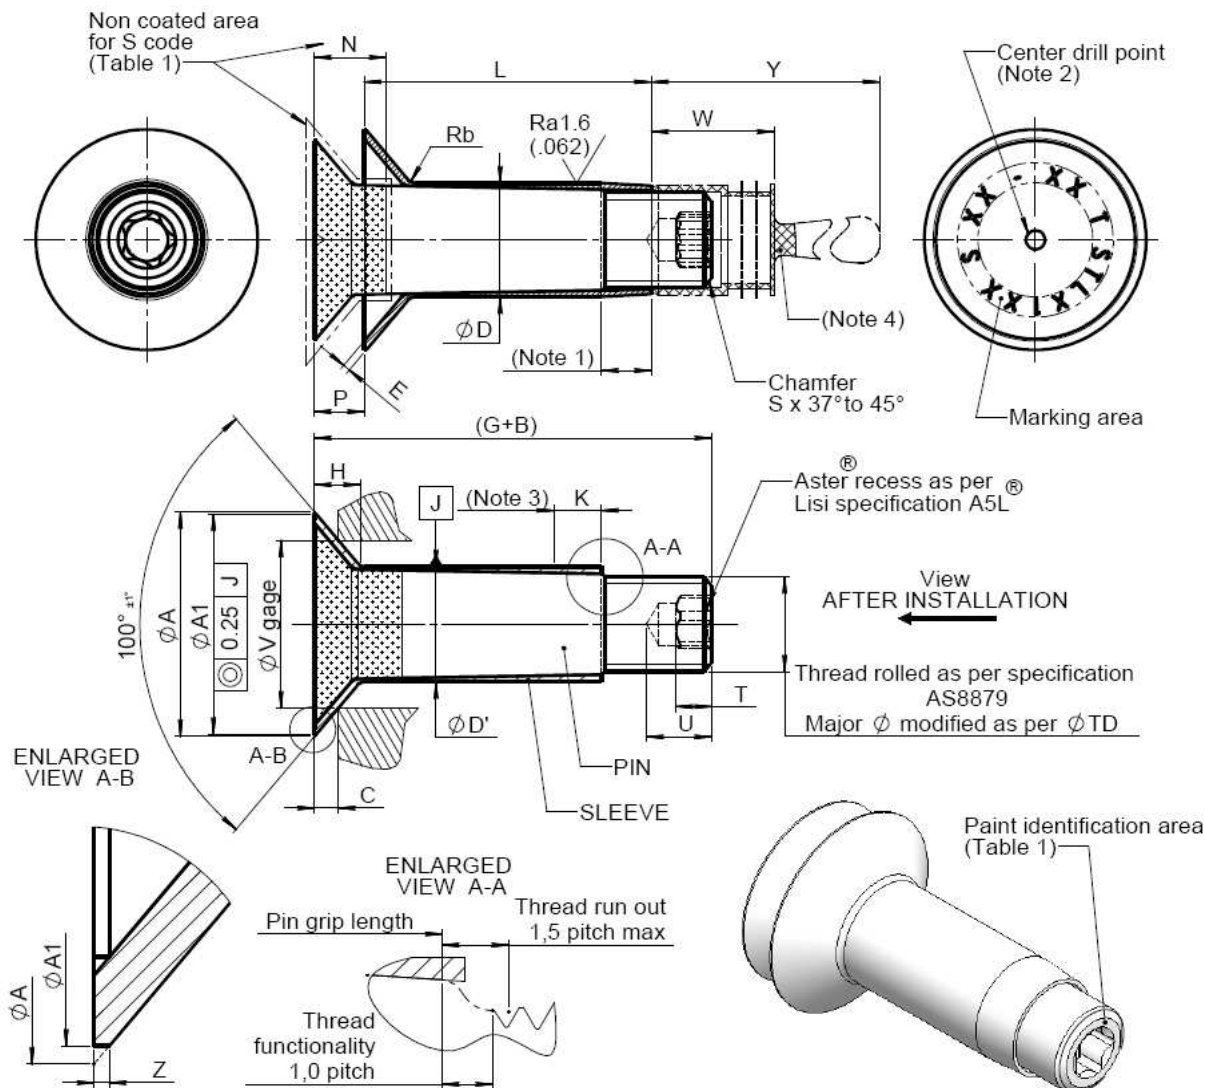

Note 1: $\varnothing D$ is not applicable on the non supported sleeve extremity on the length equal to K Max.

Note 2: Drill center dimple in top of head, $\varnothing$: 0.9mm (0.0354") Max. Depth: 0.254 mm (0.010") Max. Drill center concentric to $\varnothing A1$ within 0.203mm (0.008").

Note 3: The expanded D' diameter shall be in accordance with values specified on table 2, except on sleeve extremity on the length equal to K max. In this area, max diameter may be 0.025mm (.001) greater than D'max, min diameter is identical to D'min.

Note 4: Unserviceable part, to be removed during fastener installation (see installation specification).

FIGURE 1

NOTES:

UNLESS OTHERWISE SPECIFIED

I. Units:

II. Surface Texture:

III. Break sharp edges:

IV. Thread:

Dimensions and tolerances are in millimeters (inch). Dimensions to be met after finish

Ra3.2 ($\sqrt{125}$) per ASME B46.1 before coating

0.05/0.2mm (.002/.008inch). Bolt and sleeve shall be free from burrs

Per AS8879 except reduced major $\varnothing$ as tabulated

Technical Center	Prepared by	Signature	Approved by	Signature	Date	Revision
PAGE 1/12	A. BERTHOU		B.REGNARD		5 th – APR – 12	C

**SLEEVE TAPER-HI-LITE[®],
 100° FLUSH HEAD
 INCONEL pin shear 125 ksi min
 3/32 grip variation
 Nominal size**

STL150

1. APPLICATION

This product standard specifies the dimensions, tolerances and properties of an Inconel SLEEVE TAPER-HI-LITE[®] fastener system designed to target 0,6% minimum interference fit for use in composite / composite or composite / aluminum aerospace structure.
 It applies to nominal size only. Repairs are covered by STL1150 for first oversize (+1/64") and STL2150 for second oversize (+1/32").
 Maximum operating temperature of 235°C (455°F).

2. REQUIREMENTS

Table 1: Material, finish and identification

FINISH CODE	MATERIAL		FINISH		IDENTIFICATION
	PIN	SLEEVE	PIN	SLEEVE	
S	Inconel 718 as per AMS 5962 or 5662 + cold working Min. shear strength: Rc min = 862 MPa (125 ksi)	321 CRES per AMS 5510 or AMS 5645	Non-chromated aluminum based coating: HI-KOTE [®] 1NC as per EN4473 type II except specified area (see figure 1) and Cetyl Alcohol lube per Hi-Shear spec 305 Solvent base	Passivate per AMS 2700. METHOD 1. TYPE 6 or 8. CLASS 3 and cetyl alcohol lube per Hi-Shear spec 305 Solvent base	Blue paint on pin extremity
P	Min. tensile strength: Rm min = 1517 MPa (220 ksi)		Non-chromated aluminum based coating: HI-KOTE [®] 1NC as per EN4473 type II and Cetyl Alcohol lube per Hi-Shear spec 305 Solvent base		



**SLEEVE TAPER-HI-LITE[®],
100° FLUSH HEAD
INCONEL pin shear 125 ksi min
3/32 grip variation
Nominal size**

STL150

Table 2: Dimensions and Tolerances

See figure 1

Ø code (1/32")	Thread as per AS8879 Ø TD modified UNJF 3A	Ø A1	Ø A	B	C to ØV		Ø D	Ø D' after installation		E	H	N	P	S	T	U	Ø V	Z	Ø TD		Rb
		ref	ref	Max	min	Max	± 0.0125 (± 0.0005)	min	Max	ref	ref	min	Max	ref	min	Max	gage	Max	min	Max	Max
6	.1900-32	13,40 (0.528)	14,06 (0.553)	15,88 (0.625)	2,116 (0.0833)	2,369 (0.0933)	6,325 (0.2490)	6,433 (0.2532)	6,468 (0.2546)	0,60 (0.024)	3,25 (0.128)	7,70 (0.303)	6,83 (0.269)	0,79 (0.031)	1,85 (0.073)	7,58 (0.298)	8,410 (0.3311)	0,32 (0.012)	4,597 (0.1810)	4,673 (0.1840)	1,25 (0.049)
7	.2160-28	14,74 (0.580)	15,39 (0.606)	16,54 (0.651)	2,122 (0.0835)	2,376 (0.0936)	7,118 (0.2802)	7,227 (0.2845)	7,262 (0.2859)	0,60 (0.024)	3,48 (0.137)	7,90 (0.311)	6,80 (0.268)	0,79 (0.031)	1,94 (0.076)	7,83 (0.308)	9,725 (0.3829)	0,32 (0.012)	5,258 (0.2070)	5,334 (0.2100)	1,25 (0.049)
8	.2500-28	16,37 (0.644)	17,03 (0.671)	17,43 (0.686)	2,289 (0.0901)	2,544 (0.1001)	8,309 (0.3271)	8,425 (0.3317)	8,460 (0.3331)	0,80 (0.031)	3,67 (0.144)	7,90 (0.311)	7,38 (0.291)	0,79 (0.031)	2,14 (0.084)	8,38 (0.330)	10,970 (0.4319)	0,32 (0.013)	6,121 (0.2410)	6,197 (0.2440)	1,45 (0.057)
10	.3125-24	19,00 (0.748)	19,68 (0.775)	21,94 (0.864)	2,259 (0.0889)	2,518 (0.0991)	9,897 (0.3896)	10,023 (0.3946)	10,059 (0.3960)	0,80 (0.031)	4,11 (0.162)	8,40 (0.331)	10,99 (0.433)	1,19 (0.047)	2,24 (0.088)	12,40 (0.488)	13,680 (0.5386)	0,33 (0.013)	7,670 (0.3020)	7,772 (0.3060)	1,90 (0.075)
12	.3750-24	22,51 (0.886)	23,22 (0.914)	23,70 (0.933)	2,467 (0.0971)	2,730 (0.1075)	11,880 (0.4677)	12,025 (0.4734)	12,062 (0.4749)	1,00 (0.039)	4,76 (0.187)	8,90 (0.350)	12,59 (0.496)	1,19 (0.047)	2,45 (0.096)	13,59 (0.535)	16,710 (0.6579)	0,34 (0.013)	9,245 (0.3640)	9,347 (0.3680)	1,90 (0.075)
14	.4375-20	25,34 (0.997)	26,18 (1.031)	24,26 (0.955)	3,045 (0.1199)	3,312 (0.1304)	13,853 (0.5454)	14,008 (0.5515)	14,045 (0.5530)	1,00 (0.039)	5,18 (0.204)	9,30 (0.366)	12,90 (0.508)	1,19 (0.047)	2,75 (0.108)	13,92 (0.548)	18,282 (0.7198)	0,39 (0.016)	10,820 (0.4260)	10,947 (0.4310)	1,90 (0.075)
16	.5000-20	28,49 (1.122)	29,36 (1.156)	25,29 (0.996)	3,145 (0.1238)	3,417 (0.1345)	15,440 (0.6079)	15,606 (0.6144)	15,644 (0.6159)	1,00 (0.039)	5,84 (0.230)	10,00 (0.394)	13,56 (0.534)	1,19 (0.047)	3,11 (0.122)	14,11 (0.556)	21,210 (0.8350)	0,41 (0.016)	12,395 (0.4880)	12,522 (0.4930)	2,15 (0.085)
18	.5625-18	31,66 (1.246)	32,55 (1.282)	26,60 (1.047)	3,115 (0.1226)	3,393 (0.1336)	17,027 (0.6703)	17,202 (0.6772)	17,240 (0.6787)	1,10 (0.043)	6,52 (0.257)	10,50 (0.413)	14,32 (0.564)	1,59 (0.063)	3,55 (0.140)	14,23 (0.560)	24,466 (0.9632)	0,42 (0.016)	13,970 (0.5500)	14,097 (0.5550)	2,15 (0.085)
20	.6250-18	34,68 (1.365)	35,60 (1.402)	27,92 (1.099)	4,389 (0.1728)	4,672 (0.1839)	18,618 (0.7330)	18,812 (0.7406)	18,851 (0.7422)	1,10 (0.043)	7,13 (0.281)	11,10 (0.437)	15,56 (0.613)	1,59 (0.063)	4,13 (0.163)	14,09 (0.555)	24,466 (0.9632)	0,43 (0.017)	15,545 (0.6120)	15,697 (0.6180)	2,25 (0.089)
24	.7500-16	41,32 (1.627)	42,29 (1.665)	30,30 (1.193)	3,669 (0.1445)	3,962 (0.1560)	22,188 (0.8735)	22,405 (0.8821)	22,445 (0.8837)	1,30 (0.051)	8,44 (0.332)	12,20 (0.480)	17,26 (0.680)	1,59 (0.063)	4,87 (0.192)	13,40 (0.528)	32,850 (1.2933)	0,45 (0.018)	18,719 (0.7370)	18,872 (0.7430)	2,30 (0.091)
28	.8750-14	47,02 (1.851)	48,04 (1.891)	32,80 (1.291)	5,362 (0.2111)	5,663 (0.2230)	25,759 (1.0141)	25,999 (1.0236)	26,040 (1.0252)	1,30 (0.051)	9,35 (0.368)	13,10 (0.516)	18,72 (0.737)	1,98 (0.078)	5,46 (0.215)	14,65 (0.577)	34,540 (1.3598)	0,47 (0.018)	21,869 (0.8610)	22,047 (0.8680)	2,55 (0.100)
32	1.0000-12	53,07 (2.089)	54,13 (2.131)	34,59 (1.362)	3,521 (0.1386)	3,832 (0.1509)	28,934 (1.1391)	29,193 (1.1493)	29,235 (1.1510)	1,30 (0.051)	10,58 (0.416)	14,30 (0.563)	19,96 (0.786)	1,98 (0.078)	6,26 (0.246)	15,97 (0.629)	45,000 (1.7717)	0,49 (0.019)	25,044 (0.9860)	25,222 (0.9930)	2,90 (0.114)
36	1.1250-12	59,79 (2.354)	60,92 (2.399)	37,21 (1.465)	6,355 (0.2502)	6,680 (0.2630)	32,106 (1.2640)	32,398 (1.2755)	32,441 (1.2772)	1,30 (0.051)	12,10 (0.476)	15,80 (0.622)	22,19 (0.874)	1,98 (0.078)	7,14 (0.281)	17,91 (0.705)	45,000 (1.7717)	0,52 (0.020)	28,194 (1.1100)	28,372 (1.1170)	3,15 (0.124)

Ø code (1/32")	Thread as per AS8879 Ø TD modified UNJF 3A	Recess size code as per LISI specification ASL [®]	W (for information)	Y (for information)	K
			Max	Max	Max
6	.1900-32	A5L06	21 (0.8)	37 (1.5)	7,86 (0.310)
7	.2160-28	A5L07	22 (0.9)	38 (1.5)	7,83 (0.308)
8	.2500-28	A5L08	23 (0.9)	39 (1.5)	8,55 (0.337)
10	.3125-24	A5L10	25 (1.0)	41 (1.6)	12,23 (0.482)
12	.3750-24	A5L12	26 (1.0)	47 (1.9)	13,98 (0.551)
14	.4375-20	A5L14	28 (1.1)	49 (1.9)	14,60 (0.575)
16	.5000-20	A5L16	30 (1.2)	51 (2.0)	15,36 (0.605)
18	.5625-18	A5L18	33 (1.3)	54 (2.1)	15,91 (0.627)
20	.6250-18	A5L20	35 (1.4)	56 (2.2)	17,28 (0.680)
24	.7500-16	A5L24	42 (1.7)	63 (2.5)	19,03 (0.749)
28	.8750-14	A5L28	47 (1.9)	68 (2.7)	20,50 (0.807)
32	1.0000-12	A5L32	52 (2.0)	73 (2.9)	21,71 (0.855)
36	1.1250-12	A5L36	57 (2.2)	78 (3.1)	24,01 (0.945)

Technical Center

Revision

PAGE 3/12

C

THIS DRAWING AND ALL TECHNICAL INFORMATION DISCLOSED THEREIN ARE THE EXCLUSIVE PROPERTY OF LISI AEROSPACE

LISI AEROSPACE – Please refer to Central Documentation Website to check validity



Tour Gamma A
193, rue de Bercy
75582 PARIS CEDEX 12
Phone 33 (0)1 44 67 85 85
Fax 33 (0)1 44 67 88 76

**SLEEVE TAPER-HI-LITE[®],
100° FLUSH HEAD
INCONEL pin shear 125 ksi min
3/32 grip variation
Nominal size**

STL150

Table 3: Grip length limitations

-Ø	Grip length	
	min	Max
6	6	13
7	7	15
8	7	21
10	8	27
12	9	32
14	10	33
16	11	39
18	14	44
20	15	45
24	17	57
28	20	63
32	21	70
36	24	75

Technical Center

Revision

PAGE 4/12

C

THIS DRAWING AND ALL TECHNICAL INFORMATION DISCLOSED THEREIN ARE THE EXCLUSIVE PROPERTY OF LISI AEROSPACE

LISI AEROSPACE – Please refer to Central Documentation Website to check validity

lisi AEROSPACE
 Tour Gamma A
 193, rue de Bercy
 75582 PARIS CEDEX 12
 Phone 33 (0)1 44 67 85 85
 Fax 33 (0)1 44 67 88 76

**SLEEVE TAPER-HI-LITE[®],
 100° FLUSH HEAD
 INCONEL pin shear 125 ksi min
 3/32 grip variation
 Nominal size**

STL150

Table 4: Dimensions, grip, and sleeve length

Length Code 1/16"	Assembly Thickness		L ref	Length Code 1/16"	Assembly Thickness		L ref
	min	Max			min	Max	
4				40	61,12 (2.406)	63,50 (2.500)	63,50 (2.500)
5				41	62,71 (2.469)	65,08 (2.562)	65,08 (2.562)
6	7,15 (0.281)	9,52 (0.375)	9,52 (0.375)	42	64,30 (2.531)	66,67 (2.625)	66,67 (2.625)
7	8,74 (0.344)	11,11 (0.437)	11,11 (0.437)	43	65,89 (2.594)	68,26 (2.687)	68,26 (2.687)
8	10,32 (0.406)	12,70 (0.500)	12,70 (0.500)	44	67,47 (2.656)	69,85 (2.750)	69,85 (2.750)
9	11,91 (0.469)	14,28 (0.562)	14,28 (0.562)	45	69,06 (2.719)	71,43 (2.812)	71,43 (2.812)
10	13,50 (0.531)	15,87 (0.625)	15,87 (0.625)	46	70,65 (2.781)	73,02 (2.875)	73,02 (2.875)
11	15,09 (0.594)	17,46 (0.687)	17,46 (0.687)	47	72,24 (2.844)	74,61 (2.937)	74,61 (2.937)
12	16,67 (0.656)	19,05 (0.750)	19,05 (0.750)	48	73,82 (2.906)	76,20 (3.000)	76,20 (3.000)
13	18,26 (0.719)	20,63 (0.812)	20,63 (0.812)	49	75,41 (2.969)	77,78 (3.062)	77,78 (3.062)
14	19,85 (0.781)	22,22 (0.875)	22,22 (0.875)	50	77,00 (3.031)	79,37 (3.125)	79,37 (3.125)
15	21,44 (0.844)	23,81 (0.937)	23,81 (0.937)	51	78,59 (3.094)	80,96 (3.187)	80,96 (3.187)
16	23,02 (0.906)	25,40 (1.000)	25,40 (1.000)	52	80,17 (3.156)	82,55 (3.250)	82,55 (3.250)
17	24,61 (0.969)	26,98 (1.062)	26,98 (1.062)	53	81,76 (3.219)	84,13 (3.312)	84,13 (3.312)
18	26,20 (1.031)	28,57 (1.125)	28,57 (1.125)	54	83,35 (3.281)	85,72 (3.375)	85,72 (3.375)
19	27,79 (1.094)	30,16 (1.187)	30,16 (1.187)	55	84,94 (3.344)	87,31 (3.437)	87,31 (3.437)
20	29,37 (1.156)	31,75 (1.250)	31,75 (1.250)	56	86,52 (3.406)	88,90 (3.500)	88,90 (3.500)
21	30,96 (1.219)	33,33 (1.312)	33,33 (1.312)	57	88,11 (3.469)	90,48 (3.562)	90,48 (3.562)
22	32,55 (1.281)	34,92 (1.375)	34,92 (1.375)	58	89,70 (3.531)	92,07 (3.625)	92,07 (3.625)
23	34,14 (1.344)	36,51 (1.437)	36,51 (1.437)	59	91,29 (3.594)	93,66 (3.687)	93,66 (3.687)
24	35,72 (1.406)	38,10 (1.500)	38,10 (1.500)	60	92,87 (3.656)	95,25 (3.750)	95,25 (3.750)
25	37,31 (1.469)	39,68 (1.562)	39,68 (1.562)	61	94,46 (3.719)	96,83 (3.812)	96,83 (3.812)
26	38,90 (1.531)	41,27 (1.625)	41,27 (1.625)	62	96,05 (3.781)	98,42 (3.875)	98,42 (3.875)
27	40,49 (1.594)	42,86 (1.687)	42,86 (1.687)	63	97,64 (3.844)	100,01 (3.937)	100,01 (3.937)
28	42,07 (1.656)	44,45 (1.750)	44,45 (1.750)	64	99,22 (3.906)	101,60 (4.000)	101,60 (4.000)
29	43,66 (1.719)	46,03 (1.812)	46,03 (1.812)	65	100,81 (3.969)	103,18 (4.062)	103,18 (4.062)
30	45,25 (1.781)	47,62 (1.875)	47,62 (1.875)	66	102,40 (4.031)	104,77 (4.125)	104,77 (4.125)
31	46,84 (1.844)	49,21 (1.937)	49,21 (1.937)	67	103,99 (4.094)	106,36 (4.187)	106,36 (4.187)
32	48,42 (1.906)	50,80 (2.000)	50,80 (2.000)	68	105,57 (4.156)	107,95 (4.250)	107,95 (4.250)
33	50,01 (1.969)	52,38 (2.062)	52,38 (2.062)	69	107,16 (4.219)	109,53 (4.312)	109,53 (4.312)
34	51,60 (2.031)	53,97 (2.125)	53,97 (2.125)	70	108,75 (4.281)	111,12 (4.375)	111,12 (4.375)
35	53,19 (2.094)	55,56 (2.187)	55,56 (2.187)	71	110,34 (4.344)	112,71 (4.437)	112,71 (4.437)
36	54,77 (2.156)	57,15 (2.250)	57,15 (2.250)	72	111,92 (4.406)	114,30 (4.500)	114,30 (4.500)
37	56,36 (2.219)	58,73 (2.312)	58,73 (2.312)	73	113,51 (4.469)	115,88 (4.562)	115,88 (4.562)
38	57,95 (2.281)	60,32 (2.375)	60,32 (2.375)	74	115,10 (4.531)	117,47 (4.625)	117,47 (4.625)
39	59,54 (2.344)	61,91 (2.437)	61,91 (2.437)	75	116,69 (4.594)	119,06 (4.687)	119,06 (4.687)

Note: Given assembly thickness are the one compatible with the fastener system once installed. Structure creep if any shall be taken into account before fastener grip selection in the table.

Technical Center

Revision

PAGE 5/12

C

THIS DRAWING AND ALL TECHNICAL INFORMATION DISCLOSED THEREIN ARE THE EXCLUSIVE PROPERTY OF LSI AEROSPACE

LSI AEROSPACE – Please refer to Central Documentation Website to check validity



Tour Gamma A
193, rue de Bercy
75582 PARIS CEDEX 12
Phone 33 (0)1 44 67 85 85
Fax 33 (0)1 44 67 88 76

**SLEEVE TAPER-HI-LITE[®],
100° FLUSH HEAD
INCONEL pin shear 125 ksi min
3/32 grip variation
Nominal size**

STL150

Table 5: overall length

Length Code (1/16")	(G+B) Max												
	Ø code (1/32")												
	6	7	8	10	12	14	16	18	20	24	28	32	36
6	25,40 (1.000)												
7	26,99 (1.063)	27,65 (1.089)	28,54 (1.124)										
8	28,58 (1.125)	29,24 (1.151)	30,13 (1.186)	34,64 (1.364)									
9	30,16 (1.187)	30,82 (1.213)	31,71 (1.248)	36,22 (1.426)	37,98 (1.495)								
10	31,75 (1.250)	32,41 (1.276)	33,30 (1.311)	37,81 (1.489)	39,57 (1.558)	40,13 (1.580)							
11	33,34 (1.313)	34,00 (1.339)	34,89 (1.374)	39,40 (1.551)	41,16 (1.620)	41,72 (1.643)	42,75 (1.683)						
12	34,93 (1.375)	35,59 (1.401)	36,48 (1.436)	40,99 (1.614)	42,75 (1.683)	43,31 (1.705)	44,34 (1.746)						
13	36,51 (1.437)	37,17 (1.463)	38,06 (1.498)	42,57 (1.676)	44,33 (1.745)	44,89 (1.767)	45,92 (1.808)						
14		38,76 (1.526)	39,65 (1.561)	44,16 (1.739)	45,92 (1.808)	46,48 (1.830)	47,51 (1.870)	48,82 (1.922)					
15		40,35 (1.589)	41,24 (1.624)	45,75 (1.801)	47,51 (1.870)	48,07 (1.893)	49,10 (1.933)	50,41 (1.985)	51,73 (2.037)				
16			42,83 (1.686)	47,34 (1.864)	49,10 (1.933)	49,66 (1.955)	50,69 (1.996)	52,00 (2.047)	53,32 (2.099)				
17			44,41 (1.748)	48,92 (1.926)	50,68 (1.995)	51,24 (2.017)	52,27 (2.058)	53,58 (2.109)	54,90 (2.161)	57,28 (2.255)			
18			46,00 (1.811)	50,51 (1.989)	52,27 (2.058)	52,83 (2.080)	53,86 (2.120)	55,17 (2.172)	56,49 (2.224)	58,87 (2.318)			
19			47,59 (1.874)	52,10 (2.051)	53,86 (2.120)	54,42 (2.143)	55,45 (2.183)	56,76 (2.235)	58,08 (2.287)	60,46 (2.380)			
20			49,18 (1.936)	53,69 (2.114)	55,45 (2.183)	56,01 (2.205)	57,04 (2.246)	58,35 (2.297)	59,67 (2.349)	62,05 (2.443)	64,55 (2.541)		
21			50,76 (1.998)	55,27 (2.176)	57,03 (2.245)	57,59 (2.267)	58,62 (2.308)	59,93 (2.359)	61,25 (2.411)	63,63 (2.505)	66,13 (2.604)	67,92 (2.674)	
22				56,86 (2.239)	58,62 (2.308)	59,18 (2.330)	60,21 (2.370)	61,52 (2.422)	62,84 (2.474)	65,22 (2.568)	67,72 (2.666)	69,51 (2.737)	
23				58,45 (2.301)	60,21 (2.370)	60,77 (2.393)	61,80 (2.433)	63,11 (2.485)	64,43 (2.537)	66,81 (2.630)	69,31 (2.729)	71,10 (2.799)	
24				60,04 (2.364)	61,80 (2.433)	62,36 (2.455)	63,39 (2.496)	64,70 (2.547)	66,02 (2.599)	68,40 (2.693)	70,90 (2.791)	72,69 (2.862)	75,31 (2.965)
25				61,62 (2.426)	63,38 (2.495)	63,94 (2.517)	64,97 (2.558)	66,28 (2.609)	67,60 (2.661)	69,98 (2.755)	72,48 (2.854)	74,27 (2.924)	76,89 (3.027)
26				63,21 (2.489)	64,97 (2.558)	65,53 (2.580)	66,56 (2.620)	67,87 (2.672)	69,19 (2.724)	71,57 (2.818)	74,07 (2.916)	75,86 (2.987)	78,48 (3.090)
27				64,80 (2.551)	66,56 (2.620)	67,12 (2.643)	68,15 (2.683)	69,46 (2.735)	70,78 (2.787)	73,16 (2.880)	75,66 (2.979)	77,45 (3.049)	80,07 (3.152)
28					68,15 (2.683)	68,71 (2.705)	69,74 (2.746)	71,05 (2.797)	72,37 (2.849)	74,75 (2.943)	77,25 (3.041)	79,04 (3.112)	81,66 (3.215)
29					69,73 (2.745)	70,29 (2.767)	71,32 (2.808)	72,63 (2.859)	73,95 (2.911)	76,33 (3.005)	78,83 (3.104)	80,62 (3.174)	83,24 (3.277)
30					71,32 (2.808)	71,88 (2.830)	72,91 (2.870)	74,22 (2.922)	75,54 (2.974)	77,92 (3.068)	80,42 (3.166)	82,21 (3.237)	84,83 (3.340)
31					72,91 (2.870)	73,47 (2.893)	74,50 (2.933)	75,81 (2.985)	77,13 (3.037)	79,51 (3.130)	82,01 (3.229)	83,80 (3.299)	86,42 (3.402)
32					74,50 (2.933)	75,06 (2.955)	76,09 (2.996)	77,40 (3.047)	78,72 (3.099)	81,10 (3.193)	83,60 (3.291)	85,39 (3.362)	88,01 (3.465)
33						76,64 (3.017)	77,67 (3.058)	78,98 (3.109)	80,30 (3.161)	82,68 (3.255)	85,18 (3.354)	86,97 (3.424)	89,59 (3.527)
34							79,26 (3.120)	80,57 (3.172)	81,89 (3.224)	84,27 (3.318)	86,77 (3.416)	88,56 (3.487)	91,18 (3.590)
35							80,85 (3.183)	82,16 (3.235)	83,48 (3.287)	85,86 (3.380)	88,36 (3.479)	90,15 (3.549)	92,77 (3.652)
36							82,44 (3.246)	83,75 (3.297)	85,07 (3.349)	87,45 (3.443)	89,95 (3.541)	91,74 (3.612)	94,36 (3.715)
37							84,02 (3.308)	85,33 (3.359)	86,65 (3.411)	89,03 (3.505)	91,53 (3.604)	93,32 (3.674)	95,94 (3.777)
38							85,61 (3.370)	86,92 (3.422)	88,24 (3.474)	90,62 (3.568)	93,12 (3.666)	94,91 (3.737)	97,53 (3.840)
39							87,20 (3.433)	88,51 (3.485)	89,83 (3.537)	92,21 (3.630)	94,71 (3.729)	96,50 (3.799)	99,12 (3.902)
40								90,10 (3.547)	91,42 (3.599)	93,80 (3.693)	96,30 (3.791)	98,09 (3.862)	100,71 (3.965)

Technical Center

Revision



Tour Gamma A
193, rue de Bercy
75582 PARIS CEDEX 12
Phone 33 (0)1 44 67 85 85
Fax 33 (0)1 44 67 88 76

**SLEEVE TAPER-HI-LITE[®],
100° FLUSH HEAD
INCONEL pin shear 125 ksi min
3/32 grip variation
Nominal size**

STL150

Table 5: overall length (continued)

Length Code (1/16")	(G+B) Max												
	Ø code (1/32")												
	6	7	8	10	12	14	16	18	20	24	28	32	36
41								91,68 (3.609)	93,00 (3.661)	95,38 (3.755)	97,88 (3.854)	99,67 (3.924)	102,29 (4.027)
42								93,27 (3.672)	94,59 (3.724)	96,97 (3.818)	99,47 (3.916)	101,26 (3.987)	103,88 (4.090)
43								94,86 (3.735)	96,18 (3.787)	98,56 (3.880)	101,06 (3.979)	102,85 (4.049)	105,47 (4.152)
44								96,45 (3.797)	97,77 (3.849)	100,15 (3.943)	102,65 (4.041)	104,44 (4.112)	107,06 (4.215)
45									99,35 (3.911)	101,73 (4.005)	104,23 (4.104)	106,02 (4.174)	108,64 (4.277)
46										103,32 (4.068)	105,82 (4.166)	107,61 (4.237)	110,23 (4.340)
47										104,91 (4.130)	107,41 (4.229)	109,20 (4.299)	111,82 (4.402)
48										106,50 (4.193)	109,00 (4.291)	110,79 (4.362)	113,41 (4.465)
49										108,08 (4.255)	110,58 (4.354)	112,37 (4.424)	114,99 (4.527)
50										109,67 (4.318)	112,17 (4.416)	113,96 (4.487)	116,58 (4.590)
51										111,26 (4.380)	113,76 (4.479)	115,55 (4.549)	118,17 (4.652)
52										112,85 (4.443)	115,35 (4.541)	117,14 (4.612)	119,76 (4.715)
53										114,43 (4.505)	116,93 (4.604)	118,72 (4.674)	121,34 (4.777)
54										116,02 (4.568)	118,52 (4.666)	120,31 (4.737)	122,93 (4.840)
55										117,61 (4.630)	120,11 (4.729)	121,90 (4.799)	124,52 (4.902)
56										119,20 (4.693)	121,70 (4.791)	123,49 (4.862)	126,11 (4.965)
57										120,78 (4.755)	123,28 (4.854)	125,07 (4.924)	127,69 (5.027)
58											124,87 (4.916)	126,66 (4.987)	129,28 (5.090)
59											126,46 (4.979)	128,25 (5.049)	130,87 (5.152)
60											128,05 (5.041)	129,84 (5.112)	132,46 (5.215)
61											129,63 (5.104)	131,42 (5.174)	134,04 (5.277)
62											131,22 (5.166)	133,01 (5.237)	135,63 (5.340)
63											132,81 (5.229)	134,60 (5.299)	137,22 (5.402)
64												136,19 (5.362)	138,81 (5.465)
65												137,77 (5.424)	140,39 (5.527)
66												139,36 (5.487)	141,98 (5.590)
67												140,95 (5.549)	143,57 (5.652)
68												142,54 (5.612)	145,16 (5.715)
69												144,12 (5.674)	146,74 (5.777)
70												145,71 (5.737)	148,33 (5.840)
71													149,92 (5.902)
72													151,51 (5.965)
73													153,09 (6.027)
74													154,68 (6.090)
75													156,27 (6.152)

Technical Center

Revision



Tour Gamma A
193, rue de Bercy
75582 PARIS CEDEX 12
Phone 33 (0)1 44 67 85 85
Fax 33 (0)1 44 67 88 76

**SLEEVE TAPER-HI-LITE[®],
100° FLUSH HEAD
INCONEL pin shear 125 ksi min
3/32 grip variation
Nominal size**

STL150

Table 6: Tensile strength, fatigue load, shear strength

Ø code (1/32")	Min. Axial Tensile Strength N (lbf)	Max Tension Fatigue Load	Double Shear Strength N (lbf)
6	18 580 (4,177)	6 503 (1,462)	41 260 (9,276)
7	23 970 (5,389)	8 390 (1,886)	52 870 (11,886)
8	33 810 (7,601)	11 834 (2,660)	70 130 (15,766)
10	53 980 (12,135)	18 893 (4,247)	104 580 (23,511)
12	77 580 (17,441)	27 153 (6,104)	150 510 (33,836)
14	102 250 (22,987)	35 788 (8,045)	204 280 (45,924)
16	135 900 (30,552)	47 565 (10,693)	258 490 (58,111)
18	169 390 (38,080)	59 287 (13,328)	321 610 (72,301)
20	209 200 (47,030)	73 220 (16,461)	392 270 (88,186)
24	297 810 (66,950)	104 234 (23,433)	561 590 (126,251)
28	394 420 (88,669)	138 047 (31,034)	761 240 (171,134)
32	517 360 (116,307)	181 076 (40,708)	975 840 (219,378)
36	676 360 (152,052)	236 726 (53,218)	1 223 480 (275,049)

Notes: - Mechanical properties applied at room temperature.
- Tensile strength and fatigue load values are valid for fastener pin only. Global fastener performances depend on associated nut mechanical characteristics.

Technical Center

Revision

PAGE 8/12

C

lisi AEROSPACE
 Tour Gamma A
 193, rue de Bercy
 75582 PARIS CEDEX 12
 Phone 33 (0)1 44 67 85 85
 Fax 33 (0)1 44 67 88 76

**SLEEVE TAPER-HI-LITE[®],
 100°FLUSH HEAD
 INCONEL pin shear 125 ksi min
 3/32 grip variation
 Nominal size**

STL150

Table 7: mass

Length Code (1/16")	Mass kg/1000 parts (lb/1000 parts) For information only												
	Ø code (1/32")												
	6	7	8	10	12	14	16	18	20	24	28	32	36
6	5,23 (11.53)												
7	5,65 (12.46)	7,28 (16.05)	10,01 (22.07)										
8	6,13 (13.51)	7,82 (17.24)	10,73 (23.66)	16,11 (35.52)									
9	6,55 (14.44)	8,43 (18.58)	11,46 (25.26)	17,13 (37.77)	25,80 (56.88)								
10	6,97 (15.37)	8,96 (19.75)	12,18 (26.85)	18,16 (40.04)	27,28 (60.14)	37,70 (83.11)							
11	7,63 (16.82)	9,50 (20.94)	12,90 (28.44)	19,18 (42.28)	28,75 (63.38)	39,71 (87.55)	52,64 (116.05)						
12	8,05 (17.75)	10,36 (22.84)	14,11 (31.11)	20,20 (44.53)	30,22 (66.62)	41,71 (91.95)	55,13 (121.54)						
13	8,48 (18.70)	10,89 (24.01)	14,84 (32.72)	22,04 (48.59)	31,70 (69.89)	43,71 (96.36)	57,62 (127.03)						
14		11,42 (25.18)	15,56 (34.30)	23,07 (50.86)	33,17 (73.13)	45,71 (100.77)	60,10 (132.50)	77,69 (171.28)					
15		11,96 (26.37)	16,28 (35.89)	24,09 (53.11)	35,98 (79.32)	47,71 (105.18)	62,59 (137.99)	80,71 (177.94)	101,66 (224.12)				
16			17,01 (37.50)	25,12 (55.38)	37,46 (82.59)	51,35 (113.21)	65,07 (143.45)	83,73 (184.59)	105,28 (232.10)				
17			17,73 (39.09)	26,14 (57.63)	38,93 (85.83)	53,35 (117.62)	69,28 (152.74)	86,75 (191.25)	108,89 (240.06)	168,77 (372.07)			
18			18,45 (40.68)	27,16 (59.88)	40,40 (89.07)	55,36 (122.05)	71,77 (158.23)	89,76 (197.89)	112,50 (248.02)	173,89 (383.36)			
19			19,17 (42.26)	28,19 (62.15)	41,88 (92.33)	57,36 (126.46)	74,25 (163.69)	92,78 (204.54)	116,11 (255.98)	179,02 (394.67)			
20			19,89 (43.85)	29,21 (64.40)	43,35 (95.57)	59,36 (130.87)	76,74 (169.18)	95,79 (211.18)	119,72 (263.94)	184,14 (405.96)	258,86 (570.69)		
21			20,61 (45.44)	30,23 (66.65)	44,82 (98.81)	61,36 (135.28)	79,23 (174.67)	98,81 (217.84)	123,32 (271.87)	189,27 (417.27)	265,77 (585.92)	356,02 (784.89)	
22				31,25 (68.89)	46,29 (102.05)	63,36 (139.68)	81,71 (180.14)	101,82 (224.47)	126,93 (279.83)	194,39 (428.56)	272,67 (601.13)	364,74 (804.11)	
23				32,27 (71.14)	47,76 (105.29)	65,36 (144.09)	84,20 (185.63)	106,15 (234.02)	130,53 (287.77)	199,51 (439.84)	279,58 (616.37)	373,45 (823.32)	
24				34,31 (75.64)	49,23 (108.53)	67,36 (148.50)	86,68 (191.10)	109,17 (240.68)	134,96 (297.54)	204,62 (451.11)	286,48 (631.58)	382,16 (842.52)	506,56 (1,116.77)
25				35,34 (77.91)	50,70 (111.77)	69,36 (152.91)	89,17 (196.59)	112,19 (247.34)	138,58 (305.52)	209,74 (462.40)	293,38 (646.79)	390,87 (861.72)	517,29 (1,140.43)
26				36,36 (80.16)	52,17 (115.02)	71,36 (157.32)	91,65 (202.05)	115,21 (253.99)	142,19 (313.48)	214,86 (473.69)	300,28 (662.00)	399,58 (880.92)	528,02 (1,164.08)
27				37,38 (82.41)	53,34 (122.00)	73,36 (161.73)	94,13 (207.52)	118,23 (260.65)	145,80 (321.43)	219,97 (484.95)	307,18 (677.22)	408,28 (900.10)	538,74 (1,187.72)
28					56,81 (125.24)	75,36 (166.14)	96,62 (213.01)	121,24 (267.29)	149,41 (329.39)	225,37 (496.86)	314,08 (692.43)	416,99 (919.31)	549,47 (1,211.37)
29					58,28 (128.49)	77,35 (170.53)	99,10 (218.48)	124,26 (273.95)	153,02 (337.35)	230,50 (508.17)	320,97 (707.62)	425,69 (938.49)	560,19 (1,235.01)
30					59,75 (131.73)	79,35 (174.94)	101,58 (223.95)	127,28 (280.60)	156,63 (345.31)	235,62 (519.45)	328,24 (723.65)	434,39 (957.67)	570,91 (1,258.64)
31					61,23 (134.99)	81,34 (179.32)	104,06 (229.41)	130,29 (287.24)	160,24 (353.27)	240,75 (530.76)	335,15 (738.88)	443,09 (976.85)	581,62 (1,282.25)
32					62,70 (138.23)	83,34 (183.73)	106,54 (234.88)	133,31 (293.90)	163,85 (361.23)	245,87 (542.05)	342,06 (754.11)	452,27 (997.08)	592,34 (1,305.89)
33						85,33 (188.12)	109,02 (240.35)	136,32 (300.53)	167,46 (369.19)	250,99 (553.34)	348,96 (769.33)	460,99 (1,016.31)	603,05 (1,329.50)
34							111,50 (245.82)	139,33 (307.17)	171,06 (377.12)	256,11 (564.63)	355,87 (784.56)	469,70 (1,035.51)	613,76 (1,353.11)
35							113,97 (251.26)	142,34 (313.81)	174,67 (385.08)	261,24 (575.94)	362,78 (799.79)	478,42 (1,054.74)	624,47 (1,376.72)
36							116,45 (256.73)	145,36 (320.46)	178,27 (393.02)	266,36 (587.22)	369,68 (815.00)	487,13 (1,073.94)	635,91 (1,401.94)
37							118,93 (262.20)	148,37 (327.10)	181,88 (400.98)	271,47 (598.49)	376,59 (830.24)	495,85 (1,093.16)	646,64 (1,425.60)
38							121,40 (267.64)	151,38 (333.74)	185,48 (408.91)	276,59 (609.78)	383,49 (845.45)	504,56 (1,112.36)	657,38 (1,449.27)
39							123,88 (273.11)	154,39 (340.37)	189,08 (416.85)	281,71 (621.06)	390,39 (860.66)	513,27 (1,131.57)	668,11 (1,472.93)
40								161,76 (356.62)	198,60 (437.84)	286,83 (632.35)	397,29 (875.87)	521,98 (1,150.77)	678,84 (1,496.59)

Technical Center

Revision

lisi AEROSPACE
 Tour Gamma A
 193, rue de Bercy
 75582 PARIS CEDEX 12
 Phone 33 (0)1 44 67 85 85
 Fax 33 (0)1 44 67 88 76

**SLEEVE TAPER-HI-LITE® ,
 100° FLUSH HEAD
 INCONEL pin shear 125 ksi min
 3/32 grip variation
 Nominal size**

STL150

Table 7: mass (continued)

Length Code (1/16")	Mass kg/1000 parts (lb/1000 parts) For information only												
	Ø code (1/32")												
	6	7	8	10	12	14	16	18	20	24	28	32	36
41								164,78 (363.28)	202,21 (445.80)	291,94 (643.62)	404,19 (891.09)	530,68 (1,169.95)	689,57 (1,520.24)
42								167,80 (369.94)	205,82 (453.76)	297,06 (654.91)	411,09 (906.30)	539,39 (1,189.15)	700,30 (1,543.90)
43								170,81 (376.57)	209,43 (461.71)	302,17 (666.17)	417,99 (921.51)	548,10 (1,208.35)	711,02 (1,567.53)
44								173,83 (383.23)	213,04 (469.67)	307,28 (677.44)	424,89 (936.72)	556,80 (1,227.53)	721,75 (1,591.19)
45									216,65 (477.63)	312,39 (688.70)	431,78 (951.91)	565,50 (1,246.71)	732,47 (1,614.82)
46										323,53 (713.26)	438,68 (967.12)	574,21 (1,265.92)	743,20 (1,638.48)
47										328,66 (724.57)	445,57 (982.31)	582,91 (1,285.10)	753,92 (1,662.11)
48										333,78 (735.86)	452,46 (997.50)	591,60 (1,304.25)	764,64 (1,685.74)
49										338,90 (747.15)	459,35 (1,012.69)	600,30 (1,323.43)	775,36 (1,709.38)
50										344,02 (758.43)	466,24 (1,027.88)	609,00 (1,342.62)	786,07 (1,732.99)
51										349,14 (769.72)	473,13 (1,043.07)	617,70 (1,361.80)	796,79 (1,756.62)
52										354,26 (781.01)	480,02 (1,058.26)	626,39 (1,380.95)	807,50 (1,780.23)
53										359,38 (792.30)	486,91 (1,073.45)	635,08 (1,400.11)	818,22 (1,803.87)
54										364,50 (803.58)	493,79 (1,088.62)	643,78 (1,419.29)	828,93 (1,827.48)
55										369,62 (814.87)	500,68 (1,103.81)	652,47 (1,438.45)	839,64 (1,851.09)
56										374,74 (826.16)	514,36 (1,133.97)	661,16 (1,457.61)	850,35 (1,874.70)
57										379,86 (837.45)	521,26 (1,149.18)	669,85 (1,476.77)	861,06 (1,898.31)
58											528,17 (1,164.42)	678,53 (1,495.90)	871,76 (1,921.90)
59											535,07 (1,179.63)	692,13 (1,525.89)	883,47 (1,947.72)
60											541,96 (1,194.82)	700,84 (1,545.09)	894,20 (1,971.37)
61											548,86 (1,210.03)	709,54 (1,564.27)	904,93 (1,995.03)
62											555,76 (1,225.24)	718,25 (1,583.47)	915,66 (2,018.68)
63											562,66 (1,240.45)	726,95 (1,602.65)	926,39 (2,042.34)
64												735,66 (1,621.85)	937,11 (2,065.97)
65												744,36 (1,641.03)	947,84 (2,089.63)
66												753,06 (1,660.21)	958,56 (2,113.26)
67												761,77 (1,679.42)	969,29 (2,136.92)
68												770,47 (1,698.60)	980,01 (2,160.55)
69												779,17 (1,717.78)	990,73 (2,184.19)
70												787,87 (1,736.96)	1 001,45 (2,207.82)
71													1 012,17 (2,231.45)
72													1 022,89 (2,255.09)
73													1 033,61 (2,278.72)
74													1 044,33 (2,302.35)
75													1 055,05 (2,325.99)

Technical Center

Revision

PAGE 10/12

C



Tour Gamma A
193, rue de Bercy
75582 PARIS CEDEX 12
Phone 33 (0)1 44 67 85 85
Fax 33 (0)1 44 67 88 76

**SLEEVE TAPER-HI-LITE[®],
100° FLUSH HEAD
INCONEL pin shear 125 ksi min
3/32 grip variation
Nominal size**

STL150

3. DESIGNATION

STL 150 () () - ()

Grip code in 1/16th"

Diameter code in 1/32"

Finish code (see table 1)

Basic part number

Example:

STL150P10 – 34: SLEEVE TAPER-HI-LITE[®] fastener system countersunk head, 0.6% minimum interference fit, Inconel pin with HK1NC + cetyl alcohol lube and stainless steel passivated sleeve, diameter code 10/32" and 34/16" length.

4. MARKING

Designation and manufacturer identification per EN2424 style B with 0.25 mm (.01 inch) max depth, bolt only. Marking location as specified on Figure 1.

5. QUALIFICATION AND ACCEPTANCE

The fastener shall meet all the inspection requirements of LISI AEROSPACE Product Specification STL-TS01.

6. INSTALLATION

Refer to STL-IS10.

Technical Center

Revision

PAGE 11/12

C



Tour Gamma A
193, rue de Bercy
75582 PARIS CEDEX 12
Phone 33 (0)1 44 67 85 85
Fax 33 (0)1 44 67 88 76

**SLEEVE TAPER-HI-LITE[®],
100° FLUSH HEAD
INCONEL pin shear 125 ksi min
3/32 grip variation
Nominal size**

STL150

Issue	Date	Modifications	Justification
A	SEPT 21 st 2010	First release	
B	MAR 21 st 2011	K added L dim changed in ref Modification of views A-A & A-B Exchange of dia. A & dia. A1 dia. A, dia. A1 & H changed in ref. C and ØV dim changed table (G+B) added	Improvement for better understanding (no design change)
C	APR 5 th 2012	P dim corrected ASTER [®] codification modified dia A & dia A1 inverted in table 2	To be in accordance with definition drawings

Technical Center

Revision

PAGE 12/12

C