



(11)

For the current list of licensed manufacturers, please visit the
LISI AEROSPACE website at:
[HTTP://WWW.LISI-AEROSPACE.COM/LICENSES](http://www.lisi-aerospace.com/licenses)

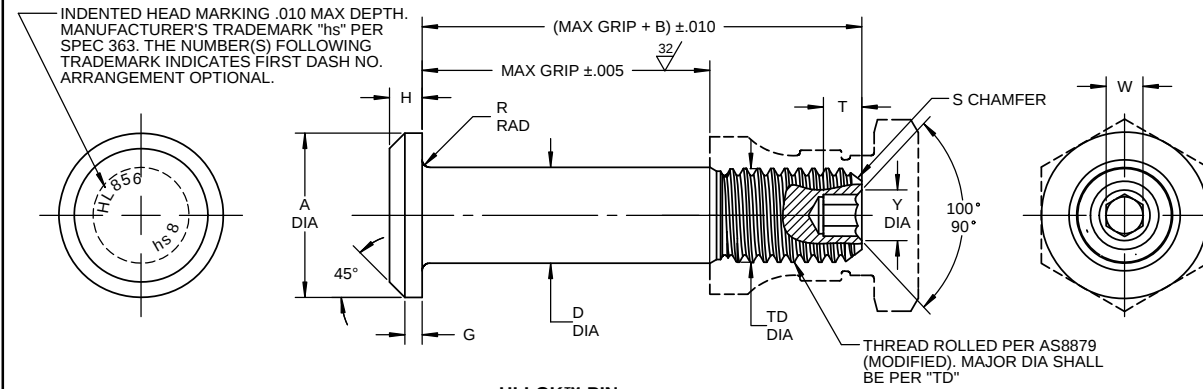

HI-LOK™ PIN

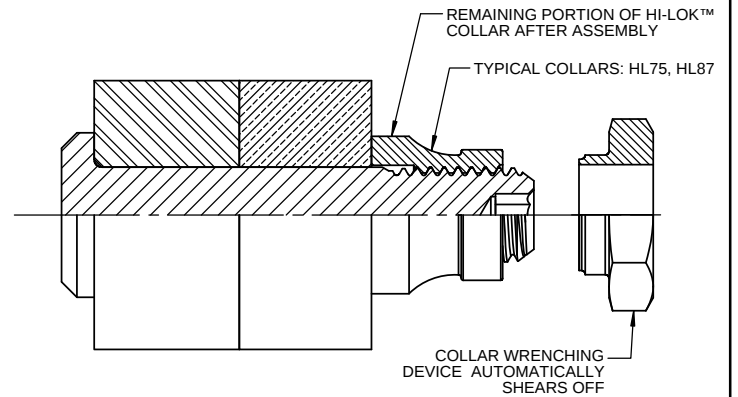

HI-LOK™ PIN AND COLLAR AFTER ASSEMBLY

[5]

FIRST DASH NO.	PIN NOM DIA	A DIA	B REF	D DIA	TD DIA	G REF	H	R RAD	S CHAMFER REF	THREAD MODIFIED	SOCKET			DOUBLE SHEAR POUNDS MINIMUM	TENSION POUNDS MINIMUM
											W HEX	T DEPTH	Y DIA		
5						NOTE: USE HL756()6(-)									
6	13/64	.377 .357	.325	.2026 .2016	.1840 .1810	.035	.074 .064	.025 .015	1/32 x 37°	.1900-32 UNJF-3A	.0806 .0791	.105 .085	.119 .104	6,130	3,180
8	17/64	.440 .415	.395	.2651 .2641	.2440 .2410	.045	.090 .080	.025 .015	1/32 x 37°	.2500-28 UNJF-3A	.0967 .0947	.110 .090	.142 .122	10,490	5,820
10	21/64	.505 .475	.500	.3276 .3266	.3060 .3020	.055	.112 .102	.030 .020	3/64 x 37°	.3125-24 UNJF-3A	.1295 .1270	.130 .110	.180 .160	16,000	9,200
12	25/64	.600 .565	.545	.3901 .3891	.3680 .3640	.075	.140 .130	.030 .020	3/64 x 37°	.3750-24 UNJF-3A	.1617 .1582	.160 .140	.217 .197	22,700	14,000
14	29/64	.676 .641	.635	.4526 .4516	.4310 .4260	.095	.160 .150	.030 .020	3/64 x 37°	.4375-20 UNJF-3A	.1930 .1895	.190 .170	.253 .233	30,600	18,900
16	33/64	.770 .735	.685	.5151 .5141	.4930 .4880	.095	.188 .178	.030 .020	3/64 x 37°	.5000-20 UNJF-3A	.2242 .2207	.220 .200	.289 .269	39,600	25,600
18	37/64	.877 .842	.770	.5771 .5761	.5550 .5500	.125	.210 .200	.040 .025	1/16 x 37°	.5625-18 UNJF-3A	.2555 .2520	.260 .240	.326 .306	49,700	32,400
20	41/64	.953 .918	.825	.6396 .6386	.6180 .6120	.140	.238 .228	.040 .025	1/16 x 37°	.6250-18 UNJF-3A	.2555 .2520	.260 .240	.326 .306	61,000	41,000
24	49/64	1.150 1.110	1.050	.7646 .7636	.7430 .7370	.200	.335 .320	.045 .030	1/16 x 37°	.7500-16 UNJF-3A	.3185 .3150	.330 .300	.398 .378	87,200	59,500
28	57/64	1.330 1.290	1.210	.8896 .8886	.8690 .8610	.250	.385 .370	.050 .035	5/64 x 37°	.8750-14 UNJF-3A	.3820 .3780	.400 .370	.471 .451	118,000	81,500
32	1-1/64	1.510 1.470	1.390	1.0146 1.0136	.9930 .9860	.300	.435 .420	.060 .045	5/64 x 37°	1.0000-12 UNJF-3A	.5100 .5040	.520 .490	.618 .598	154,000	106,000

SEE COLLAR STANDARDS
FOR COLLAR STRENGTHS.
LOWER STRENGTH (PIN OR
COLLAR) DETERMINES
SYSTEM STRENGTH

"HI-LOK", "HL", AND "HI-KOTE",
ARE TRADEMARKS OF HI-SHEAR CORPORATION

DRAWN BY J.F.OBISPO VAN	DATE 2015-04-01 1970-07-20	TITLE HI-LOK™ PIN PROTRUDING TENSION HEAD TITANIUM 1/16 GRIP VARIATION, 1/64 OVERSIZE
APPROVED R.TING	DATE 1970-07-27	DRAWING NUMBER HL856
REVISION (11)	DATE M.BEARD 2017-08-01	

- GENERAL NOTES:**
1. Concentricity: "A" to "D" diameter within .010 FIM.
 - ⑪ 2. Dimensions are in inches and to be met after finish.
 - ⑪ 3. Surface texture per ASME B46.1.
 4. Hole preparation per NAS618.
 - ⑤ Maximum "D" diameter may be increased by .0002 to allow for aluminum coating application.
 - ⑥ Non-lubed pins must be used with lubed collars or wet sealant.
 - ⑦ After February, 21st of 2015, HI-KOTE™ 1 aluminum pigmented coating will be replaced by REACH compliant HI-KOTE™ 1 NC aluminum pigmented coating per Hi-Shear Spec. 294 on fasteners coated in European Union.

MATERIAL: 6Al-4V titanium alloy per AMS4928 or AMS4967.

HEAT TREAT: 160,000 psi tensile minimum (95,000 psi shear minimum).

FINISH: ⑦ HL856AP(-)(-) = HI-KOTE™ 1 aluminum pigmented coating per Hi-Shear Spec. 294, and cetyl alcohol lube per Hi-Shear Spec. 305.

⑥ ⑦ HL856AT(-)(-) = HI-KOTE™ 1 aluminum pigmented coating per Hi-Shear Spec. 294.

HL856BJ(-)(-) = I.V.D. aluminum coating per MIL-DTL-83488, Type II, Class 3, and cetyl alcohol lube per Hi-Shear Spec. 305.

⑥ HL856BV(-)(-) = I.V.D. aluminum coating per MIL-DTL-83488, Type II, Class 3, with color blue on thread end.


HL856VF(-)(-) = Surface coating per Hi-Shear Spec. 306, Type I, color blue, and cetyl alcohol lube per Hi-Shear Spec. 305.

SPECIFICATION: HI-LOK™ Product Specification 342.

CODE: First dash number indicates nominal diameter in 1/32nds of the pin which HL856 oversize pin replaces.
 Second dash number indicates maximum grip in 1/16ths.
 See Finish note for explanation of code letters.

HOW TO ORDER

⑪ **EXAMPLE:** Pin Part Number
 HL856AP8-8



Pin Basic Part Number

Finish Code

Replaces 8/32 or 1/4 Nominal Diameter Pin

8/16 or 1/2 Maximum Grip Length