
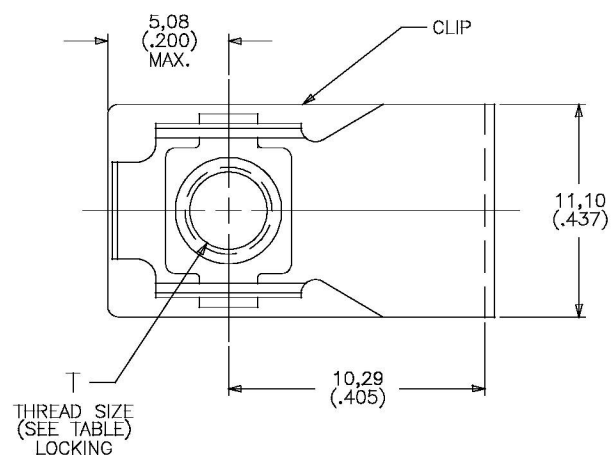


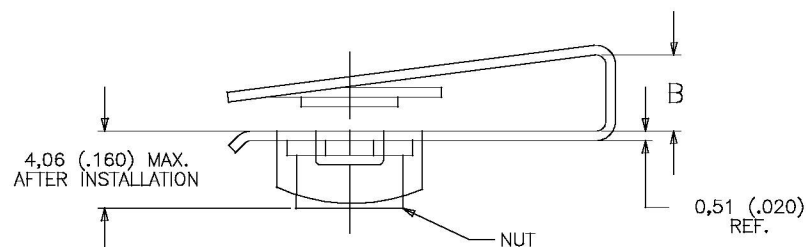

FIRST DASH NUMBER	T THREAD	EDGE DISTANCE MAX.	INSTALLATION HOLE DIA.	APPROX. WEIGHT Kg(LBS.)/100 PIECES
M4	M4 X 0,7	9,53 (.375)	5,54 – 6,63 (.218 – .261)	.150 (.331)
M5	M5 X 0,8	9,53 (.375)	5,54 – 6,63 (.218 – .261)	.150 (.331)

SECOND DASH NUMBER	PANEL THICKNESS RANGE	B MIN.
-1	0,51 – 2,28 (.020 – .090)	2,69 (.106)

130325-()-()

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:
1.1. CLIP: A286 PER AMS 5525
1.2. NUT: A286 PER AMS 5525
2. FINISH:
2.1. CLIP: PASSIVATED PER QQ-P-35
2.2. NUT: SILVER PLATED PER AMS 2411.
3. DIMENSIONS ARE IN MILLIMETERS (INCHES):
TOLERANCE: .XX = ±0,25 (.010)
ANGLES = ±2°
4. SELF-LOCKING FEATURE PER MIL-N-25027.
5. PART NUMBER EXAMPLE:

1 3 0 3 2 5 - () - ()
 _____ PANEL THICKNESS.
 _____ THREAD SIZE.
 _____ BASIC PART NUMBER.

ISSUE	DESCRIPTION	DATE
130325M	REVISION	

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. FRACTION ANGLES NOTED	DRAWN BY: C.K.T. 3-23-95 DATE	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA	
	MATERIAL: NOTED	CHECKED BY: _____ DATE		
	HEAT TREAT: NOTED	APPROVED BY: _____ DATE	TITLE: CLIP NUT ASSEMBLY, M4, M5, & M6 SIZES, LOCKING	
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY: _____ DATE		
		MFG. ACCEPT: _____ DATE	CODE IDENT. NO. 60119	SIZE B
			DRAWING NUMBER: 130325-()-()	
			SCALE: NONE	SHEET 1 OF 1