


187006

① BEFORE BENDING

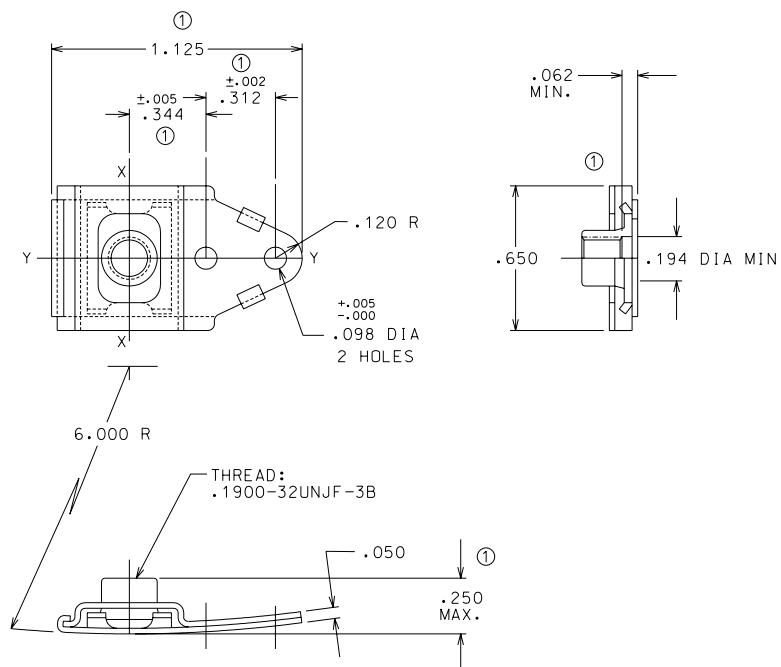

NOTES:(UNLESS OTHERWISE SPECIFIED)

1. MATERIAL: CARBON STEEL
2. FINISH: NUT - CADMIUM PLATE, QQ-P-416, CLASS 3 PLUS MOLYBDENUM DISULFIDE DRY FILM LUBRICANT, MEETS SALT SPRAY REQUIREMENTS OF QQ-P-416, TYPE II.  
BASKET AND SHIM - CADMIUM PLATE, QQ-P-416 TYPE II, CLASS 3.
3. THREADS: MIL-S-8879 (PRIOR TO ADDITION OF DRY FILM LUBRICANT)
4. THREAD SQUARENESS:MIL-N-25027 (NUT ONLY)
5. FLOAT: .150 MIN ON X-X AXIS  
.020 MIN ON Y-Y AXIS
6. WEIGHT MAX: 88LB/100

ISSUE	DESCRIPTION	DATE
REVISION		9518-005

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES. TOLERANCES  
DECIMALS FRACTION ANGLES  
±0.015

MATERIAL: NOTED

HEAT TREAT: NOTED

FINAL PROTECTIVE FINISH:  
NOTED

DRAWN BY: DATE

CKT 7-31-95

CHECKED BY: DATE

R.A.D. 7-31-95

APPROVED BY: DATE

APPROVED BY: DATE

MFG. ACCEPT.: DATE

MFG. ACCEPT.: DATE

THE MONADNOCK COMPANY  
CITY OF INDUSTRY, CALIFORNIATITLE:  
NUT-ANCHOR,  
FLOATING, ONE LUGCODE IDENT. NO. SIZE DRAWING NUMBER:  
60119 B 187006

SCALE: NONE SALES SHEET 1 OF 1