



CENTRAL SEINE
46 – 50 Quai de la Rapée
75583 PARIS CEDEX 12
Phone 33 (0)1 40 19 82 00
Fax 33 (0)1 40 19 82 01

STARLITE™ NUT

6AL-4V Titanium

Hexagonal, self-locking, up to 2nd pin shank oversize (for use with HI-LOK™ pins)

STR10

Patent Pending

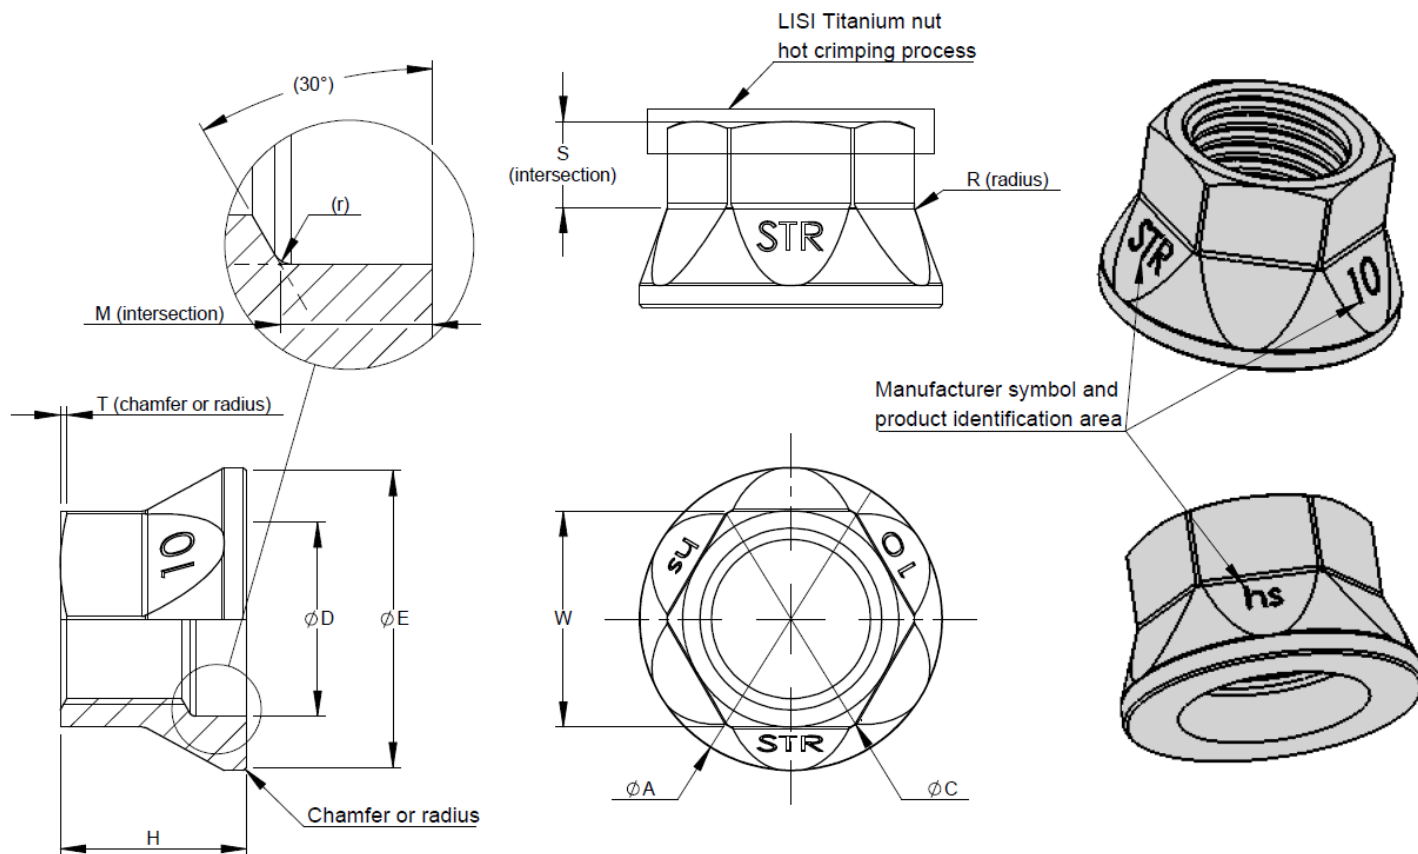


FIGURE 1: CONFIGURATION

NOTES:

UNLESS OTHERWISE SPECIFIED

- | | | |
|------|------------------------|---|
| I. | Units | Dimensions and tolerances are in millimeters (inches).
Reference unit for dimensions and tolerances is millimeter (Inches values are for information).
Reference unit for loads is Newton (Lbf values are for information).
Dimensions apply after finish. |
| II. | Surface texture | As per ASME B- before coating.
- $R_a \text{ max.} = 3,2\mu\text{m} \left(\sqrt[125]{\text{ }} \right)$.
- Tool mark or distortion permissible in the locking area. |
| III. | Tread | UNJF-3B as per SAE AS8879, except diameter code 5 (UNJC-3B) |

Technical
Center

Written by

Signature

Approved by

Signature

Date

Revision

PAGE 1/6

INNOVATEAM

J.GOYER

2015-09-25

A



STARLITE™ NUT
6AL-4V Titanium
Hexagonal, self-locking,
up to 2nd pin shank oversize
(for use with HI-LOK™ pins)

STR10

Patent Pending

1. APPLICATION

This product standard specifies the dimensions, tolerances and properties of a titanium nut for use in aerospace application at a maximum operating temperature of 350°F (177°C).
 The STR10 nut of STARLITE™ product line is designed to fit HI-LOK™ pins (with cylindrical shank), nominal diameter, first and second oversizes.
 Third oversize is covered by STR310 nut.

2. REQUIREMENTS

Table 1: Material, finish and identification

FINISH CODE	MATERIAL	FINISH
K	Titanium alloy 6AL-4V per AMS4928, AMS4965 or AMS4967, solution heat treated and aged. Min. shear strength : Rc min = 95 KSI (655 MPa) Min. tensile strength : Rm min =160 KSI (1103 MPa)	HI-KOTE™ 4NC non-chromated aluminum based coating as per EN4473 type IV, HS294 or NAS4006 Class NC.

Technical
Center

Revision

STARLITE™ NUT
6AL-4V Titanium
Hexagonal, self-locking,
up to 2nd pin shank oversize
(for use with HI-LOK™ pins)

STR10

Patent Pending

Table 2 : Dimensions and tolerances

Dia. code	Thread UNJF- 3B	Ø A	Ø C	Ø D	Ø E	H	M	r	R	S	T	W ⁽²⁾	
		Max	min	±.003 (±0,08)	min	Max	min	ref	Max	min	Max	min	Max
5	.1640- 32 ⁽¹⁾	.272 (6,93)	.233 (5,91)	.183 (4,64)	.252 (6,41)	.241 (6,13)	.105 (2,67)	.020 (0,51)	.030 (0,77)	.079 (2,01)	.012 (0,31)	.215 (5,46)	.219 (5,56)
6	.1900- 32	.340 (8,64)	.268 (6,81)	.238 (6,05)	.320 (8,12)	.272 (6,92)	.131 (3,32)	.020 (0,51)	.030 (0,77)	.083 (2,10)	.012 (0,31)	.245 (6,22)	.249 (6,32)
7	.2160- 28	.371 (9,42)	.304 (7,71)	.254 (6,44)	.351 (8,91)	.285 (7,25)	.123 (3,11)	.020 (0,51)	.030 (0,77)	.093 (2,37)	.013 (0,32)	.276 (7,01)	.280 (7,11)
8	.2500- 28	.442 (11,24)	.339 (8,61)	.301 (7,64)	.422 (10,73)	.315 (8,00)	.136 (3,45)	.020 (0,51)	.030 (0,77)	.102 (2,59)	.013 (0,34)	.307 (7,80)	.311 (7,90)
10	.3125- 24	.544 (13,83)	.410 (10,41)	.364 (9,25)	.524 (13,32)	.370 (9,40)	.143 (3,64)	.020 (0,51)	.030 (0,77)	.124 (3,16)	.013 (0,34)	.370 (9,40)	.374 (9,50)
12	.3750- 24	.657 (16,70)	.552 (14,02)	.430 (10,92)	.637 (16,18)	.414 (10,51)	.142 (3,61)	.020 (0,51)	.040 (1,02)	.182 (4,61)	.019 (0,47)	.495 (12,57)	.499 (12,67)
14	.4375- 20	.758 (19,26)	.623 (15,82)	.493 (12,53)	.738 (18,75)	.490 (12,45)	.153 (3,88)	.020 (0,51)	.040 (1,02)	.230 (5,85)	.022 (0,57)	.557 (14,15)	.561 (14,25)
16	.5000- 20	.869 (22,09)	.694 (17,63)	.556 (14,12)	.850 (21,58)	.538 (13,67)	.153 (3,88)	.020 (0,51)	.040 (1,02)	.239 (6,08)	.024 (0,62)	.617 (15,67)	.621 (15,77)
18	.5625- 18	.973 (24,71)	.765 (19,43)	.618 (15,70)	.953 (24,20)	.555 (14,10)	.160 (4,06)	.020 (0,51)	.040 (1,02)	.248 (6,30)	.025 (0,64)	.680 (17,27)	.684 (17,37)
20	.6250- 18	1.030 (26,17)	.879 (22,33)	.681 (17,29)	1.010 (25,66)	.550 (13,97)	.160 (4,06)	.020 (0,51)	.040 (1,02)	.251 (6,37)	.028 (0,71)	.771 (19,58)	.775 (19,69)
24	.7500- 16	1.234 (31,36)	1.049 (26,66)	.812 (20,63)	1.214 (30,85)	.623 (15,82)	.167 (4,24)	.020 (0,51)	.040 (1,02)	.309 (7,86)	.031 (0,80)	.928 (23,57)	.932 (23,67)
28	.8750- 14	1.415 (35,95)	1.192 (30,27)	.938 (23,83)	1.395 (35,44)	.694 (17,63)	.178 (4,53)	.020 (0,51)	.040 (1,02)	.351 (8,90)	.035 (0,90)	1.052 (26,72)	1.056 (26,82)
32	1.0000- 12	1.610 (40,89)	1.334 (33,88)	1.064 (27,03)	1.590 (40,38)	.797 (20,26)	.193 (4,91)	.020 (0,51)	.040 (1,02)	.378 (9,60)	.038 (0,97)	1.178 (29,92)	1.182 (30,02)

(1) Dia. Code 5: UNJC-3B thread as per SAE AS8879

(2) Deformed for self-locking. Dimensions apply before deformation.

Technical
Center

Revision

STARLITE™ NUT
6AL-4V Titanium
Hexagonal, self-locking,
up to 2nd pin shank oversize
(for use with HI-LOK™ pins)

STR10

Patent Pending

Table 3: Tensile strength, mass and wrench size

Dia. Code	Thread UNJF-3B	Min. Axial Tensile Strength⁽²⁾ Lbf (N)	Mass Lb/1000 parts (Kg/1000parts)	Wrench Size (inch)
5	.1640-32 ⁽¹⁾	2 300 (10 231)	.973 (0,441)	7/32
6	.1900-32	2 750 (12 233)	1.469 (0,666)	1/4
7	.2160-28	3 875 (17 237)	1.966 (0,892)	9/32
8	.2500-28	5 000 (22 241)	2.753 (1,249)	5/16
10	.3125-24	8 300 (36 920)	4.667 (2,117)	3/8
12	.3750-24	12 700 (56 492)	8.986 (4,076)	1/2
14	.4375-20	19 000 (84 516)	13.508 (6,127)	9/16
16	.5000-20	25 500 (113 430)	18.680 (8,473)	5/8
18	.5625-18	29 000 (128 998)	23.227 (10,536)	11/16
20	.6250-18	32 000 (142 343)	27.220 (12,347)	25/32
24	.7500-16	42 000 (186 825)	43.821 (19,877)	15/16
28	.8750-14	62 000 (275 790)	60.165 (27,291)	1-1/16
32	1.0000-12	84 000 (373 651)	87.225 (39,565)	1-3/16

(1) Dia. code 5: UNJC-3B thread as per SAE AS8879

(2) Mechanical properties apply at room temperature.

Tensile value is valid for nut only.

See pin standards for pin strengths.

Lower strength (pin or nut) determines system strength.



CENTRAL SEINE
46 – 50 Quai de la Rapée
75583 PARIS CEDEX 12
Phone 33 (0)1 40 19 82 00
Fax 33 (0)1 40 19 82 01

STARLITE™ NUT
6AL-4V Titanium
Hexagonal, self-locking,
up to 2nd pin shank oversize
(for use with HI-LOK™ pins)

STR10

Patent Pending

3. DESIGNATION

STR10 K ()

Dia. code number in 1/32nds inch

Finish code (table 1)

Basic part number

Example:

STR10K16: STR™10 nut for HI-LOK™ pins fastener systems, Titanium alloy 6AL-4V coated with non-chromated coating HI-KOTE™ 4NC, dia. size ½ inch.

4. MARKING

Manufacturer symbol and basic part number “STR10” on the flange area (except Ø5/32”: manufacturer symbol only). Marking shall be positioned as indicated on Figure 1.

5. QUALIFICATION AND ACCEPTANCE

The STR10 nuts shall meet all the inspection requirements of LISI AEROSPACE Qualification and Acceptance Specification STR-QA03.

6. INSTALLATION

Refer to LISI AEROSPACE Installation Specification STR-IS02.

Technical
Center

Revision



STARLITE™ NUT
6AL-4V Titanium
Hexagonal, self-locking,
up to 2nd pin shank oversize
(for use with HI-LOK™ pins)

STR10

Patent Pending

Revision	Date	Modifications	Justification
A	2015-09-25	Initial release	

THIS DRAWING AND ALL TECHNICAL INFORMATION DISCLOSED THEREIN ARE THE EXCLUSIVE PROPERTY OF LISI AEROSPACE

Technical Center		Revision
PAGE 6/6		A