
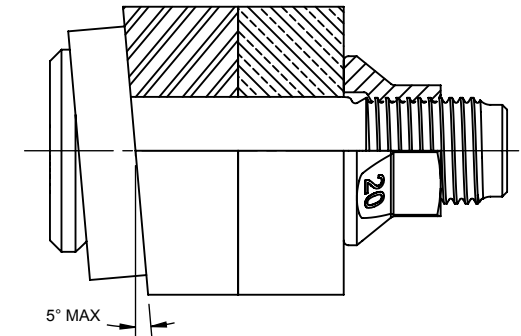


②

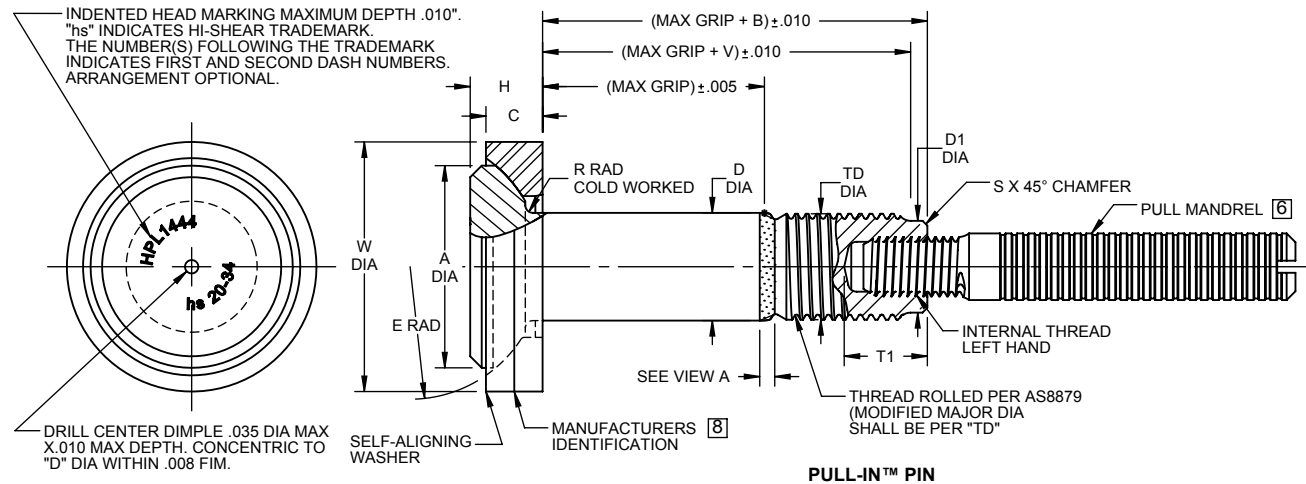

EXAMPLE OF PULL-IN™ PIN AND NUT/COLLAR AFTER ASSEMBLY

TABLE 1

FIRST DASH NO.	PIN NOM DIA	A DIA REF	B REF	D DIA	TD DIA	D1 DIA	W DIA	H MAX	S CHAMFER REF	V REF	E RAD	R RAD ROLLED	C REF	THREAD MODIFIED	INTERNAL THREAD LEFT HAND [9]			DOUBLE SHEAR POUNDS MINIMUM	TENSION POUNDS MINIMUM	TENSION-TENSION FATIGUE POUNDS MAX
															T1 MAX	THREAD SIZE UNJF-2B	LOAD POUNDS MAX			
20	11/16	1.130	.935	.6865 .6855	.6180 .6120	.5413 .5394	1.437 1.430	.405	.020	.733	.750	.040 .025	.319	6250-18 UNJF-3A	.520	3/8-SP	14,200	92,900	49,458	16,816
24	13/16	1.291	1.125	.8115 .8105	.7430 .7370	.6575 .6555	1.689 1.681	.547	.020	.927	.875	.045 .030	.358	7500-16 UNJF-3A	.625	7/16-SP	19,109	129,800	81,469	28,500
28	15/16	1.449	1.315	.9365 .9355	.8680 .8610	.7717 .7697	1.921 1.913	.634	.020	1.021	1.000	.050 .035	.390	8750-14 UNJF-3A	.725	1/2-SP	31,500	172,600	112,121	38,210
32	1-1/16	1.602	1.500	1.0615 1.0605	.9930 .9860	.8819 .8799	2.134 2.126	.712	.020	1.151	1.125	.060 .045	.437	1.0000-12 UNJF-3A	.830	9/16-SP	38,218	220,200	132,100	48,900

SEE NUT/COLLAR STANDARDS FOR STRENGTHS. LOWER STRENGTH (PIN OR NUT/COLLAR) DETERMINES SYSTEM STRENGTH.

- GENERAL NOTES:**
1. Concentricity: "A" to "D" diameter within .010 FIM.
 2. Dimensions in inches and to be met after finish.
 - ③ 3. Surface texture per AMSE B46.1.
 4. Hole preparation per HSL/HPL-IS01: PULL-STEM™ / PULL-IN™ fastener installation specification for HSL/HPL pins.
 5. HPL1444 is the oversize replacement for HPL1434.
 - ⑥ 6. Mandrel is sold separately.
 7. Product in accordance with LISI AEROSPACE Product Specification N°415.
 - ⑧ 8. One line indicates Blanc Aero Industries, France as manufacturer.
 - ⑨ 9. The maximum allowable installation load must not exceed the maximum load values in table or thread/mandrel failure may occur.
 - ⑩ 10. After February 21st of 2015, HI-KOTE™ 1 aluminum pigmented coating per Hi-Shear Spec. 294 will be replaced by REACH compliant HI-KOTE™ 1 NC aluminum pigmented coating per Hi-Shear Spec. 294 on fasteners coated in the European Union.

THIS AREA OF SPECIAL CONFIGURATION AND COLD WORKING TO MEET PHYSICAL REQUIREMENTS



VIEW A

HI-LITE™ THREAD TRANSITION AREA
SEE SPECIFICATION FOR INSPECTION

"HI-KOTE", "HI-LITE", "PULL-IN" AND "HPL", ARE TRADEMARKS OF HI-SHEAR CORPORATION			
DRAWN BY ASSYSTEM	DATE 2012-05-21	TITLE PULL-IN™ PIN SELF-ALIGNING TENSION HEAD INTERFERENCE FIT NICKEL BASE ALLOY (INCONEL 718) 1/16 GRIP VARIATION, 1/16 OVERSIZE	
APPROVED J.GOYER	DATE 2012-05-21		
REVISION ②	DATE F.CARINGELLA 2017-10-25	DRAWING NUMBER HPL1444	

FINISH TABLE

Part	Finish, Lube, ID Code	Finish	Lube	Identification
Inconel Pin	10 SU	HI-KOTE™ 1 Aluminum Pigmented Coating per Hi-Shear Spec. 294	Cetyl alcohol lube per Hi-Shear Spec. 305	Blue color on pin end
	NSU	HI-KOTE™ 1 NC Aluminum Pigmented Coating per Hi-Shear Spec. 294		
Titanium Washer	10 APW	HI-KOTE™ 1 Aluminum Pigmented Coating per Hi-Shear Spec. 294	Cetyl alcohol lube per Hi-Shear Spec. 305	White spot on outside diameter
	NAPW	HI-KOTE™ 1 NC Aluminum Pigmented Coating per Hi-Shear Spec. 294		

MATERIAL: Pin = Nickel base alloy (Inconel 718) per AMS5662 or AMS5962.
 Washer = 6Al-4V Titanium alloy per AMS4928 or AM4967.

HEAT TREAT: Pin = 220,000 psi tensile minimum and 125,000 psi shear minimum.
 Washer = 160,000 psi tensile minimum and 95,000 psi shear minimum.

CODE: First dash number indicates nominal diameter in 1/32nds of the pin which HPL1444 oversize pin replaces.
 Second dash number indicates maximum grip in 1/16ths.
 See "Finish" note for explanation of code letters.

HOW TO ORDER Pin-Washer Assembly Part Number
 © **EXAMPLE:** HPL1444 NSU 20 NAPW 34

34/16 or 2 Maximum Grip Length
 Washer finish code
 20/32 or 5/8 Nominal Diameter Pin
 Finish Code
 Pin Basic Part Number

HPL1444

DRAWING NUMBER

HPL1444

2 OF 2