


2600 Skypark Drive
Torrance, California 90509 U.S.A.
Telephone (310) 326-8110
FAX (310) 784-4144

CAGE = Commercial And Government Entity


HI-SHEAR CORPORATION, U.S.A. (Patent Holder) CAGE No. 73197
Division of Hi-Shear Industries, Inc., U.S.A.
AIR INDUSTRIES CO., INC. (Licensee - U.S. & Canada) CAGE No. 06725
SPS TECHNOLOGIES, U.S.A. (Licensee) CAGE No. 56878
HI-SHEAR FASTENERS EUROPE LTD., U.K. (Licensee) CAGE No. 0LB68
Division of Hi-Shear Industries, Inc., U.S.A.

HUCK INTERNATIONAL GmbH & Co. Germany (Licensee-EEC Countries)
SIMMONDS S.A. France (Licensee-EEC Countries-Collars)
St.-CHAMOND GRANAT S.A. France (Licensee-EEC Countries)
TOKYO SCREW COMPANY, Japan (Licensee-Japan)

943103

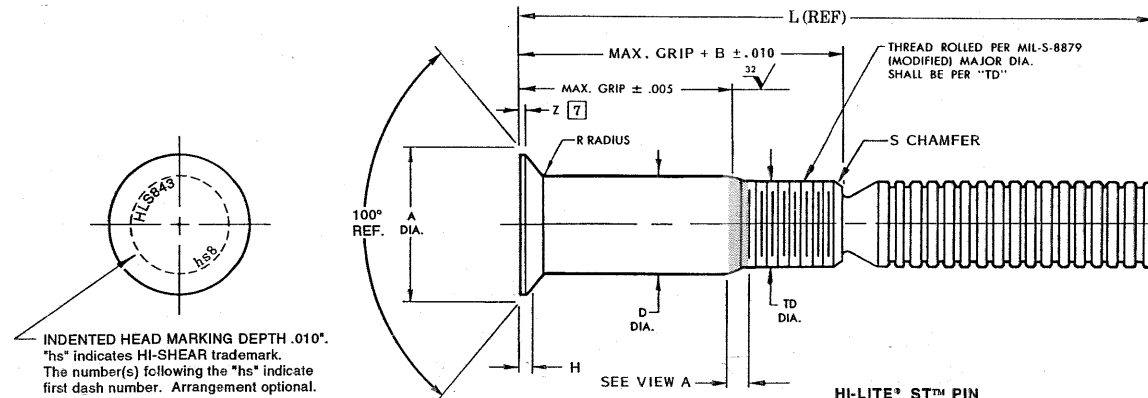


INDENTED HEAD MARKING DEPTH .010".
"hs" indicates HI-SHEAR trademark.
The number(s) following the "hs" indicate first dash number. Arrangement optional.

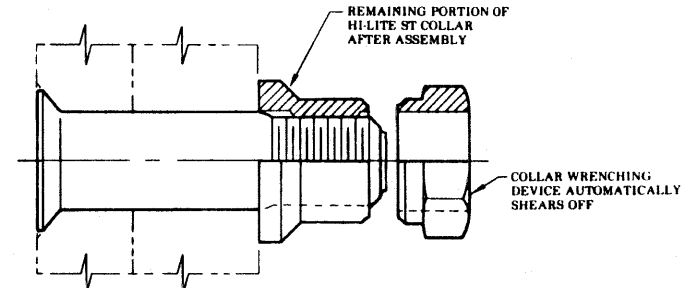

HI-LITE® ST™ PIN AND COLLAR AFTER ASSEMBLY

FIRST DASH NO.	NOM. DIA.	A DIA.	B REF.	D DIA.	TD DIA.	F	H	R RAD.	Z MAX.	S CHAMFER REF.	THREAD	DOUBLE SHEAR POUNDS MINIMUM	TENSION POUNDS MINIMUM
5													
6	3/16	.3813 .3765	.325	.2182 .2172	.1840 .1810	.005	.0684 .0664	.030 .020	.015	1/32" x 45°	10-32UNJF-3A Modified	9,400	4,350
8	1/4	.5066 .5018	.395	.2807 .2797	.2440 .2410	.006	.0948 .0928	.030 .020	.015	1/32" x 45°	1/4-28UNJF-3A Modified	15,500	7,750
10	5/16	.6335 .6287	.500	.3432 .3422	.3060 .3020	.007	.1218 .1198	.040 .030	.015	3/64" x 45°	5/16-24UNJF-3A Modified	23,200	12,300
12	3/8	.7604 .7556	.545	.4057 .4047	.3680 .3640	.008	.1488 .1468	.040 .030	.015	3/64" x 45°	3/8-24UNJF-3A Modified	32,400	19,100
14	7/16	.8884 .8812	.635	.4682 .4672	.4310 .4260	.009	.1763 .1733	.050 .040	.022	3/64" x 45°	7/16-20UNJF-3A Modified	43,100	25,800
16	1/2	1.0139 1.0068	.685	.5307 .5297	.4930 .4880	.010	.2027 .1997	.050 .040	.022	3/64" x 45°	1/2-20UNJF-3A Modified	55,400	34,300

SEE COLLAR STANDARDS FOR COLLAR STRENGTHS. LOWER STRENGTH (PIN OR COLLAR) DETERMINES SYSTEM STRENGTH.

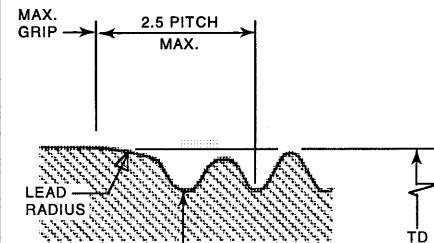

VIEW A
HI-LITE THREAD TRANSITION AREA. THIS AREA OF SPECIAL CONFIGURATION AND COLD WORKING TO MEET PHYSICAL REQUIREMENTS. SEE SPECIFICATION FOR INSPECTION.

GENERAL NOTES:

- Head edge out of roundness shall not exceed "F".
- Concentricity: Conical surface of head to "D" diameter within .005 FIM.
- "H" is dimensioned from maximum "D" diameter.
- Dimensions to be met after finish.
- Surface texture per ANSI B46.1.
- Hole preparation per NAS618.
- Curved or flat edge manufacturer's option.
- Oversize replacement for HSL823 and HSL833.
- Lead radius must be tangent to "D" diameter at max grip.
- Shorter or longer grips than those listed may be available as specials.

CODE: First dash number indicates nominal diameter in 1/32nds of the pin which HSL843 oversize pin replaces.
Second dash number indicates maximum grip in 1/16ths.
See Finish note for explanation of code letters.

HOW TO ORDER EXAMPLE:

HSL843DL-8-8
8/16 or 1/2 Maximum Grip Length
8/32 or 1/4 Nominal Diameter
Pin Part Number

MATERIAL: Nickel Base Alloy per AMS 5662.

HEAT TREAT: 125,000 psi shear minimum.

FINISH: ② HSL843AP-()-() = Hi-Kote 1 aluminum coating per Hi-Shear Spec. 294, and cetyl alcohol lube per Hi-Shear Spec. 305.
HSL843DL-()-() = Kalgard FA or EMC620C solid film lube per MIL-L-46010, Type I, and cetyl alcohol lube per Hi-Shear Spec. 305.

SPECIFICATION: ② Hi-Lite Product Specification 380-2.

U.S. Patents 4,326,825; 4,485,510 and 4,957,401. Other U.S. and foreign patents pending. "Hi-Lite" is a registered trademark and "Hi-Lite ST" is a trademark of Hi-Shear Corporation.	
DRAWN E.BEELES	DATE 3/28/94
APPROVED E.E.B.	DATE 3-28-94
REVISION ②	DATE J.F.Obispo 10-16-95
HI-LITE® ST™ PIN 100° FLUSH MS24694 TENSION HEAD BREAK STEM - INTERFERENCE FIT NICKEL BASE ALLOY (INCONEL 718) 1/16" GRIP VARIATION - 1/32" OVS	
DRAWING NUMBER HSL843 Sheet 1 of 2	



2600 Skypark Drive
Torrance, California 90509 U.S.A.
Telephone (310) 326-8110
FAX (310) 784-4144

10

SECOND DASH NO.	L REFERENCE						
		-6	-8	-10	-12	-14	-16
1		-----	-----	-----	-----	-----	-----
2		.955	.940	-----	-----	-----	-----
3		1.080	1.065	1.185	-----	-----	-----
4		1.205	1.190	1.310	1.300	-----	-----
5		1.330	1.315	1.435	1.425	1.530	-----
6		1.455	1.440	1.560	1.550	1.655	1.645
7		1.580	1.565	1.685	1.675	1.780	1.770
8		1.705	1.690	1.810	1.800	1.905	1.895
9		1.830	1.815	1.935	1.925	2.030	2.020
10		1.955	1.940	2.060	2.050	2.155	2.145
11		2.080	2.065	2.185	2.175	2.280	2.270
12		2.205	2.190	2.310	2.300	2.405	2.395
13		2.330	2.315	2.435	2.425	2.530	2.520
14		2.455	2.440	2.560	2.550	2.655	2.645
15		2.580	2.565	2.685	2.675	2.780	2.770
16		2.705	2.690	2.810	2.800	2.905	2.895
17		2.830	2.815	2.935	2.925	3.030	3.020
18		2.955	2.940	3.060	3.050	3.155	3.145
19		3.080	3.065	3.185	3.175	3.280	3.270
20		3.205	3.190	3.310	3.300	3.405	3.395
21		3.330	3.315	3.435	3.425	3.530	3.520
22		3.455	3.440	3.560	3.550	3.655	3.645
23		3.580	3.565	3.685	3.675	3.780	3.770
24		3.705	3.690	3.810	3.800	3.905	3.895
25		-----	-----	3.935	3.925	4.030	4.020
26		-----	-----	4.060	4.050	4.155	4.145
27		-----	-----	4.185	4.175	4.280	4.270
28		-----	-----	4.310	4.300	4.405	4.395
29		-----	-----	-----	-----	4.530	4.520
30		-----	-----	-----	-----	4.655	4.645
31		-----	-----	-----	-----	4.780	4.770
32		-----	-----	-----	-----	4.905	4.895

DRAWING NUMBER

HSL843

SHEET 2 OF 2

HSL843