


130338-()

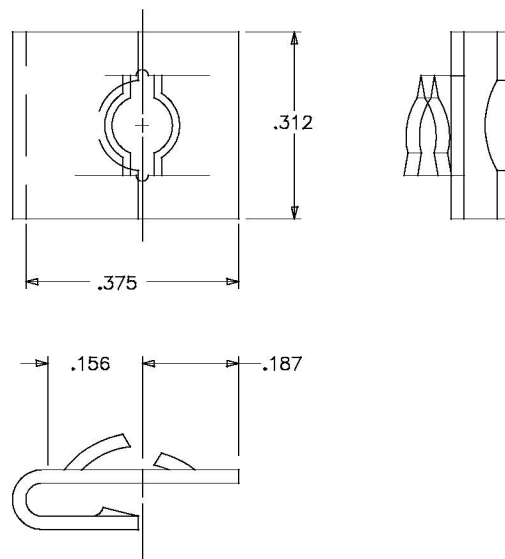


INSTALLATION DATA

DASH NO.	PANEL THICKNESS	MAX. EDGE DISTANCE FROM CENTER HOLE	HOLE DIA.
-3	.032-.035	.156	.187

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: CARBON STEEL, .022 \pm .001 THICK PER ASTM-A-684, AND ASTM-A-682.
2. HEAT TREAT: TEMPERED
3. FINISH: PHOSPHATE TREATMENT PER SPECIFICATION MIL-C-490, TYPE I, AND ZINC CHROMATE PRIMER PER SPECIFICATION MIL-P-8585
4. THREAD SIZE OR SCREW SIZE = 6Z

ISSUE	DESCRIPTION	DATE
	REVISION	9913-015

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES ± .010 ± 1°		DRAWN BY: DATE: CKT 12-28-99		 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA				
	MATERIAL:		CHECKED BY: DATE: C. TANNA 01-06-00						
	HEAT TREAT:		APPROVED BY: DATE: D. MARTIN 01-07-00		TITLE: CLIP NUT, J TYPE, 6Z SIZE, NAS 488				
	FINAL PROTECTIVE FINISH:		APPROVED BY: DATE: C. MARTIN 01-10-00						
NOTED		MFG. ACCEPT: DATE: D. PANZER 01-10-00		CODE INDENT. NO. 60119		SIZE B		DRAWING NUMBER: 130338-()	
				SCALE: NONE		SALES		SHEET 1 OF 1	