



13100010-()-()

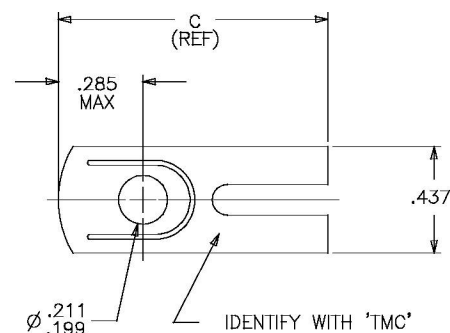

FIRST DASH NO.	A ±0.25 ±.010	EDGE DISTANCE MAX.	C (REF)	SECOND DASH NO.	B MIN	PANEL THICKNESS RANGE
-1	6.98 .275	6.35 .250	14.73 .580	-1	1.52 .060	0.51-1.52 .020-.060
-2	10.29 .405	9.53 .375	18.03 .710	-2	3.18 .125	1.52-3.18 .060-.125
-3	12.95 .510	12.70 .500	20.70 .815	-3	4.06 .160	0.51-4.06 .020-.160
-4	13.46 .530	12.70 .500	21.21 .835	-4	4.75 .187	3.18-4.75 .125-.187
-5	16.76 .660	15.75 .620	24.51 .965	-5	6.35 .250	4.75-6.35 .187-.250

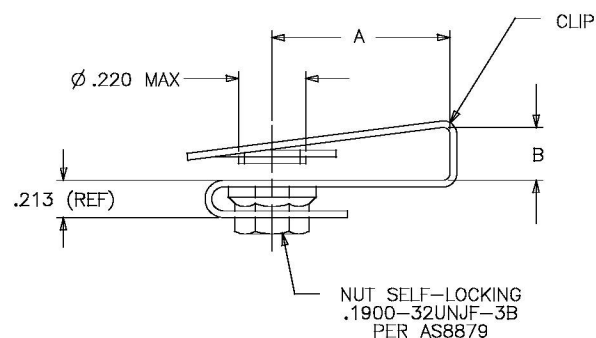

NOTES:

- MATERIAL:
CLIP: A286 CRES PER AMS5525, 140 K.S.I. MINIMUM, .020 THICK.
NUT: A286 CRES PER AMS5731 CAPABLE OF AMS5732 OR AMS 5734 CAPABLE OF AMS 5737.
- FINISH:
CLIP: PASSIVATED PER AMS-QQ-P-35.
NUT: DRY FILM LUBRICANT PER MIL-PRF-46010 TYPE II, OR EQUIVALENT.
SUFFIX "E" = ESNA LUBE 382
- LOCKING TORQUE PER NASM25027.
- DIMENSIONS: MILLIMETERS/INCHES.
- INSTALLATION HOLE SIZE: .222-.262 DIA
- PART CALLOUT EXAMPLE:

13100010 - 1 - 1 E
ESNA LUBE 382
SECOND DASH NUMBER (SEE TABLE)
FIRST DASH NUMBER = "A" DIM. (.275) "C" DIM. (.580)

L	ECN # 8059	11/25/03
K	ECN # 5422	12/05/96
ISSUE	DESCRIPTION	DATE
REVISION		

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES ± .010	DRAWN BY: CKT 11-4-88	DATE: 11-4-88	THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	MATERIAL: NOTED	CHECKED BY: CKT 11-4-88	DATE: 11-4-88			
	HEAT TREAT: NOTED	APPROVED BY: M.COHEN	DATE: 11-21-88	TITLE: NUT ASSY.- CLIP ON, 10-32 SIZE STAINLESS STEEL		
	FINAL PROTECTIVE FINISH: NOTED	MFG. ACCEPT: D.PAUL 11-5-88	DATE: 11-5-88	CODE IDENT. NO. 60119	SIZE B	DRAWING NUMBER: 13100010-()-()
				SCALE NONE	SALES	SHEET 1 OF 1