
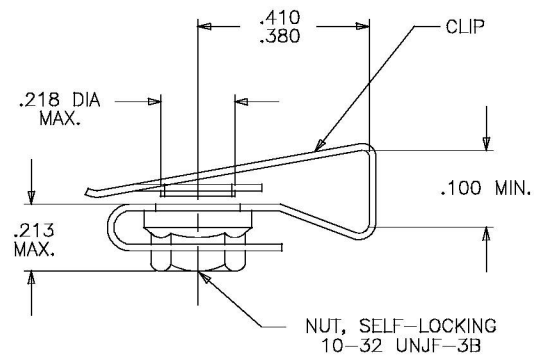



13100100

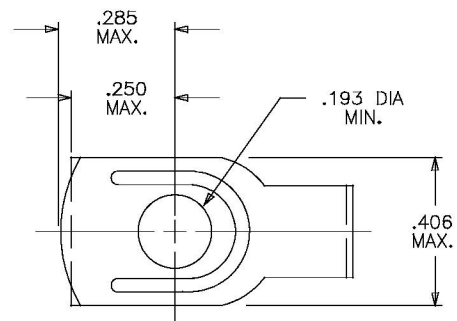

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:
CLIP: 1050 CARBON STEEL
NUT: 4037 ALLOY STEEL
2. HEAT TREAT:
CLIP: Rc 48 MINIMUM
NUT: Rc 40 MINIMUM
3. FINISH:
CLIP: ZINC PLATED PER ASTM-B-633 TYPE II, CLASS SC2
NUT: ZINC PLATED PER ASTM-B-633 TYPE II, CLASS SC2.
MOLYBDENUM DISULFIDE DRY FILM LUBRICANT
4. RECOMMENDED INSTALLATION HOLE .218 DIA MIN.

ISSUE	DESCRIPTION	DATE
REVISION		

NEXT ASSEMBLY END ITEM	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES ± .01		DRAWN BY: DATE CKT 6-25-02		 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA				
	MATERIAL: NOTED		CHECKED BY: DATE T. CSIK 06/21/02		TITLE: NUT ASSY.- CLIP-ON 1032 SIZE				
	HEAT TREAT: NOTED		APPROVED BY: DATE F. DIAZ 06/26/02		CODE IDENT. NO. SIZE DRAWING NUMBER: 60119 B 13100100				
	FINAL PROTECTIVE FINISH: NOTED		APPROVED BY: DATE R. DUENAS 06/26/02						
			MFG. ACCEPT: DATE R. RODRIGUEZ 06/26/02		SCALE: NONE		SALES		SHEET 1 OF 1