



13100084

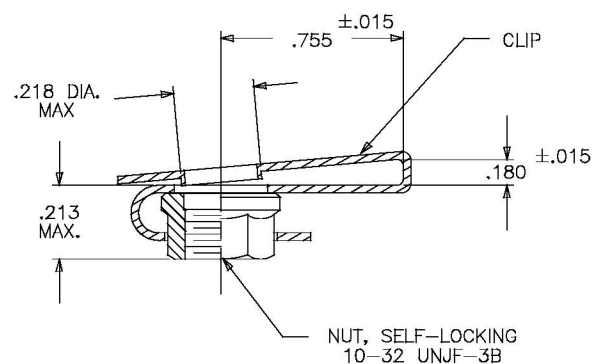


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:
CLIP: CARBON STEEL
NUT: ALLOY STEEL
2. HEAT TREAT:
CLIP: Rc 48 MINIMUM
NUT: Rc 40 MINIMUM.
3. FINISH:
CLIP: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 1.
NUT: CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2. DRY FILM LUBRICANT PER AS5272, TYPE 1.
4. MOUNTING SHEET THICKNESS: .020-.090.
5. NOMINAL EDGE DISTANCE: .615-.705

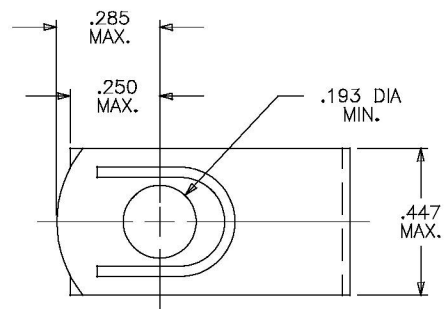

ISSUE	DESCRIPTION	DATE
	REVISION	0013-004

NEXT ASSEMBLY END ITEM	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES $\pm .010$	DRAWN BY: J.ROJAS 03-23-00	DATE: 03-23-00	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	MATERIAL: NOTED	CHECKED BY: C.TANAKA 03-28-00	DATE: 03-28-00			
	HEAT TREAT: NOTED	APPROVED BY: C.TANAKA 03-28-00	DATE: 03-28-00	TITLE: NUT ASSY.- CLIP-ON 1032 SIZE		
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY: D.MARTIN 03-28-00	DATE: 03-28-00			
		MFG. ACCEPT: D.PANTZER 03-28-00	DATE: 03-28-00	CODE INVENT. NO. 60119	SIZE B	DRAWING NUMBER: 13100084
				SCALE: NONE	SALES	SHEET 1 OF 1