
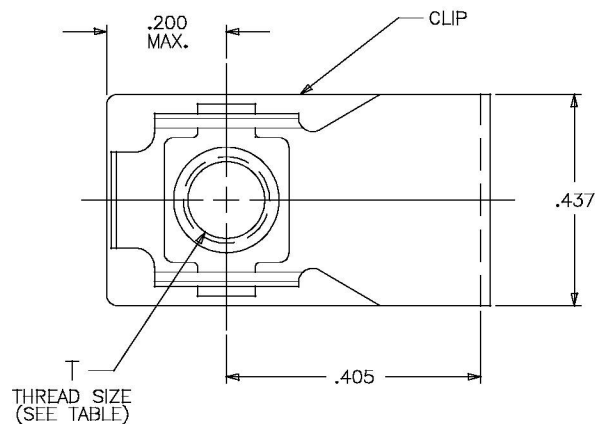


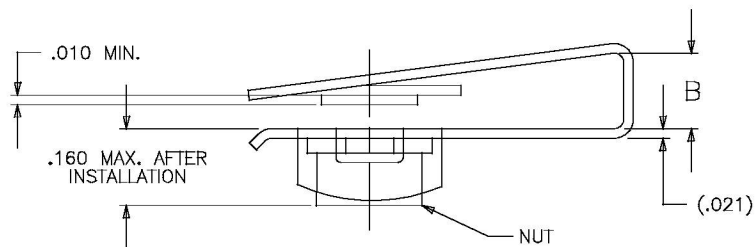

FAA-TSO AUTHORIZED PART

FIRST DASH NUMBER	T THREAD -3B	EDGE DISTANCE	INSTALLATION HOLE DIA.	APPROX. WEIGHT LB/100 PIECES
-04	.1120-40UNJC	.375	.190-.229	.32
-06	.1380-32UNJC	.375	.190-.229	.32
-08	.1640-32UNJC	.375	.190-.229	.33
-3	.1900-32UNJF	.375	.218-.261	.33

SECOND DASH NUMBER	PANEL THICKNESS RANGE	B MIN.
-1	.020-.125	.125
-2	.090-.160	.160
-3	.160-.250	.250

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:
 - 1.1 CLIP: CARBON STEEL, HEAT TREATED.
 - 1.2 NUT: CARBON STEEL, HEAT TREATED.
2. FINISH:
 - 2.1 CLIP: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2.
 - 2.2 NUT: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2, AND DRY FILM LUBRICANT PER AS 5272, TYPE I, FULL COVERAGE ON THREADS OTHER SURFACES OPTIONAL.
3. SELF-LOCKING FEATURE PER MIL-DTL-25027
4. TOLERANCE:

.XX	= ± .03
.XXX	= ± .010
ANGLES	= ± 2°
5. PART NUMBER EXAMPLE:

1 3 0 3 0 0 - () - ()

PANEL THICKNESS
THREAD SIZE
BASIC PART NUMBER

B	ECN # 6205	1-05-99
ISSUE	DESCRIPTION	DATE
REVISION		9013-006

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES NOTED	DRAWN BY: R.A.D. 5-18-90	DATE 5-18-90	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA	
	MATERIAL: NOTED	CHECKED BY: C.K.T. 5-18-90	DATE 5-18-90		TITLE: CLIP NUT ASSEMBLY, #4, #6, #8 & #10 SIZES
	HEAT TREAT: NOTED	APPROVED BY: C.TANAKA 5-18-90	DATE 5-18-90		
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY: J.ADAMS 5-24-90	DATE 5-24-90		
		WFO. ACCEPT: R.PAUL 5-29-90	DATE 5-29-90		
		SCALE: NONE		SALES	SHEET 1 OF 1

130300-()-()