
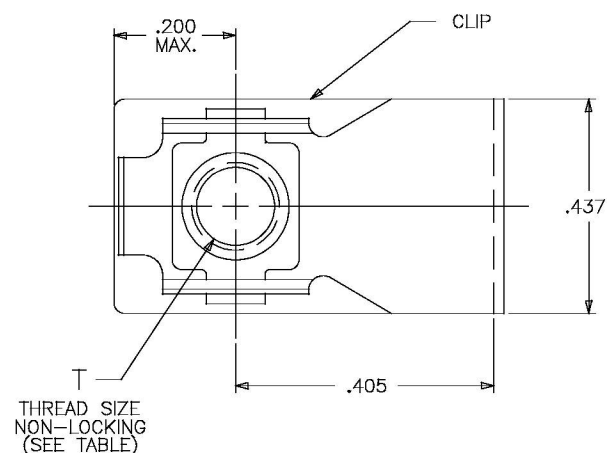


130314-()-()

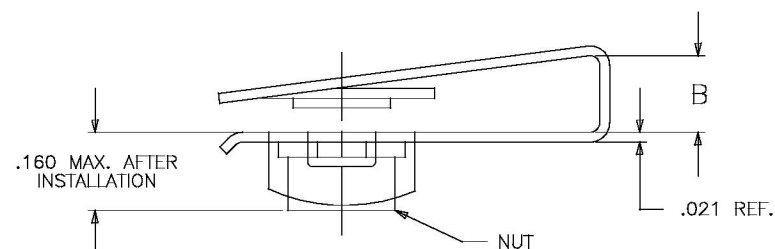

FIRST DASH NUMBER	T THREAD -3B	EDGE DISTANCE	INSTALLATION HOLE DIA.	APPROX. WEIGHT LB/100 PIECES
-04	.1120-40UNJC	.375	.190-.229	.33
-06	.1380-32UNJC			
-08	.1640-32UNJC			
-3	.1900-32UNJF			

SECOND DASH NUMBER	PANEL THICKNESS RANGE	B MIN.
-1	.020-.060	.060
-2	.020-.125	.125
-3	.125-.187	.187
-4	.187-.250	.250

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:
 - 1.1. CLIP: CARBON STEEL, HEAT TREATED.
 - 1.2. NUT: CARBON STEEL, HEAT TREATED.
2. FINISH:
 - 2.1. CLIP: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2.
 - 2.2. NUT: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2.
3. TOLERANCE:

.XX	=	±.02
.XXX	=	±.010
ANGLES	=	±2°

4. PART NUMBER EXAMPLE:
 1 3 0 3 1 4 - () - ()

PANEL THICKNESS.
 THREAD SIZE.
 BASIC PART NUMBER.

ISSUE	DESCRIPTION	DATE
	REVISION	9313-021

NEXT ASSEMBLY END ITEM	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE: IN INCHES, TOLERANCES: DECIMALS FRACTION ANGLES	DRAWN BY: F.D.	DATE: 6-10-93	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	NOTED	CHECKED BY: RAD	DATE: 6/15/93			
	MATERIAL: NOTED	APPROVED BY: RON DUENAS	DATE: 78/93	TITLE: CLIP NUT ASSEMBLY, #04, #06, #08 & #10 SIZES, NON-LOCKING		
	HEAT TREAT: NOTED	APPROVED BY: J ADAMS	DATE: 7/16/93			
	FINAL PROTECTIVE FINISH: NOTED	MFG. ACCEPT: M POTTER	DATE: 8/2/93	CODE IDENT. NO. 60119	SIZE B	DRAWING NUMBER: 130314-()-()
				SCALE: NONE	SALES	SHEET 1 OF 1