
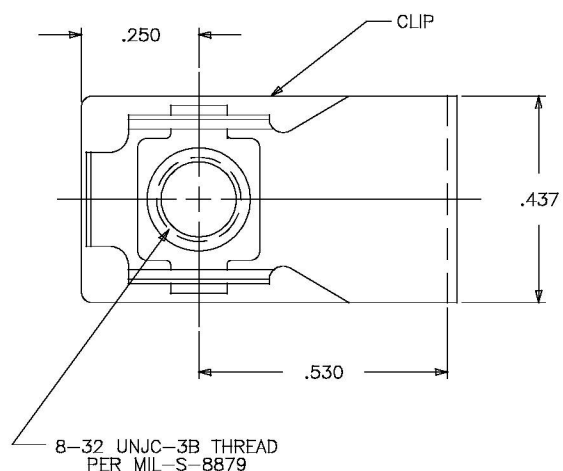


130328-08-()

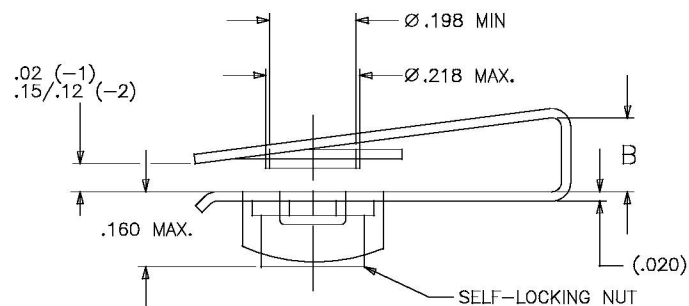

SECOND DASH NUMBER	B MIN.
-1	.160
-2	.250

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL: 17-7PH CRES PER AMS5528, CONDITION TH1050.
- 1.1. CLIP: 17-7PH CRES PER AMS5528, CONDITION TH1050.
- 1.2. NUT: A286 CRES PER AMS5732 OR AMS5737, 140,000 PSI MIN.
2. FINISH: PASSIVATED PER AMSQQ-P-35.
- 2.1. CLIP: PASSIVATED PER AMSQQ-P-35.
- 2.2. NUT: SILVER PLATED PER AMS2410 .0003-.0004 THICK.

ISSUE	DESCRIPTION	DATE

REPRODUCTION OF THIS DRAWING OR MANUFACTURE OF THE PROPRIETARY PARTS SHOWN HERE WITHOUT WRITTEN PERMISSION OF THE MONADNOCK COMPANY IS PROHIBITED.

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES ±.010	DRAWN BY: TSC 11/7/02	DATE: 11/7/02	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA		
	MATERIAL: NOTED	CHECKED BY: CKT 11/8/02	DATE: 11/8/02			
	HEAT TREAT: NOTED	APPROVED BY: BG 11/8/02	DATE: 11/8/02	TITLE: CLIP NUT ASSEMBLY, 8-32 SIZE,		
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY: RGP 11/8/02	DATE: 11/8/02			
		MFG. ACCEPT: RAD 11/8/02	DATE: 11/8/02	CODE IDENT. NO. 60119	SIZE B	DRAWING NUMBER: 130328-08-()
		SCALE: NONE		SALES		SHEET 1 OF 1