


13400002

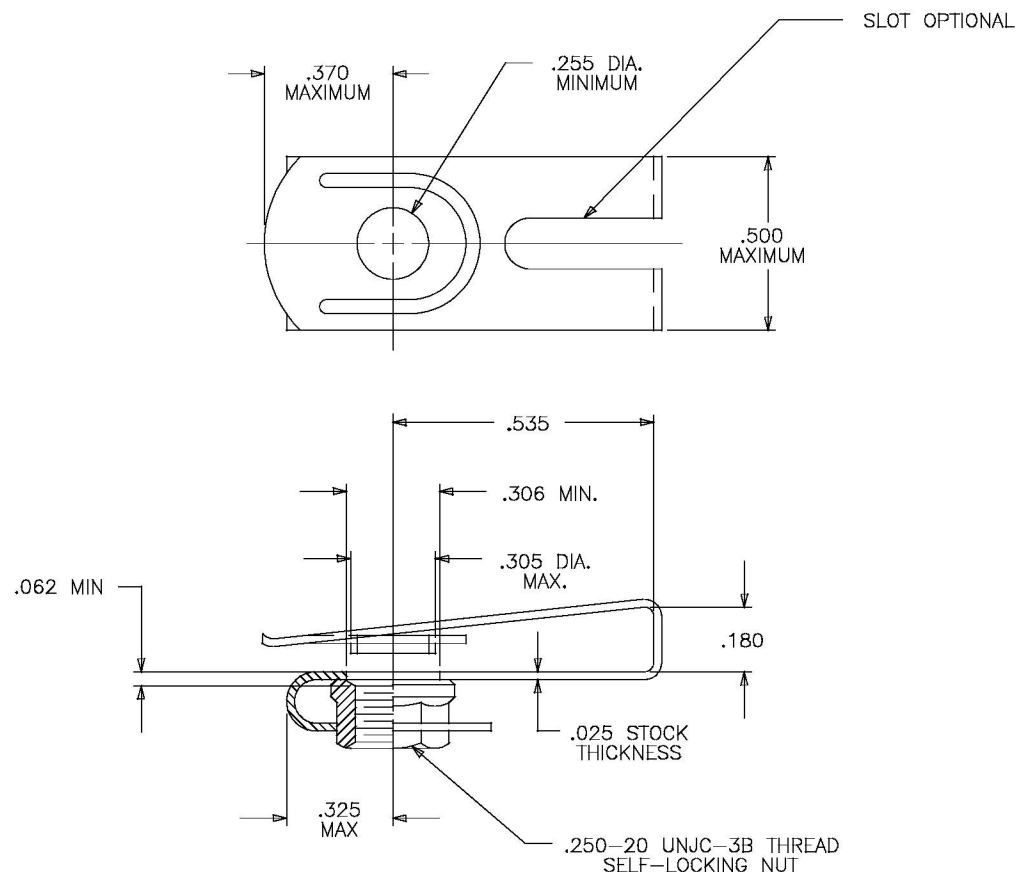

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:
 - 1.1 CLIP: CARBON STEEL
 - 1.2 NUT: ALLOY STEEL
2. HEAT TREAT:
 - 2.1 CLIP: RC 46 MINIMUM
 - 2.2 NUT: RC 35 MINIMUM
3. FINISH:
 - 3.1 CLIP: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 1.
 - 3.2 NUT: CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2 AND MOLYBDENUM DISULFIDE DRY FILM LUBRICANT.
4. MOUNTING SHEET THICKNESS: .050-.125
5. NOMINAL EDGE DISTANCE: .500.
6. RECOMMENDED INSTALLATION HOLE DIAMETER: .305-.312.

FAA-TSO AUTHORIZED PART

ISSUE	DESCRIPTION	DATE
	REVISION	9213-008

NEXT ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES DECIMALS FRACTION ANGLES $\pm .010$ $\pm 1^\circ$	DRAWN BY: F.D.	DATE 10-21-92	 THE MONADNOCK COMPANY CITY OF INDUSTRY, CALIFORNIA
	MATERIAL: NOTED	CHECKED BY: R.A.D.	DATE 11-10-92	
	HEAT TREAT: NOTED	APPROVED BY: C. TANAKA	DATE 11-12-92	
	FINAL PROTECTIVE FINISH: NOTED	APPROVED BY: J. ADAMS	DATE 11-16-92	
		MFG. ACCEPTED: D. PAUL	DATE 11-13-92	TITLE: NUT ASSEMBLY, CLIP-ON TYPE, 1/4-20 SIZE CODE INVENT. NO. 60119 SIZE B DRAWING NUMBER: 13400002 SCALE: NONE SALES SHEET 1 OF 1